
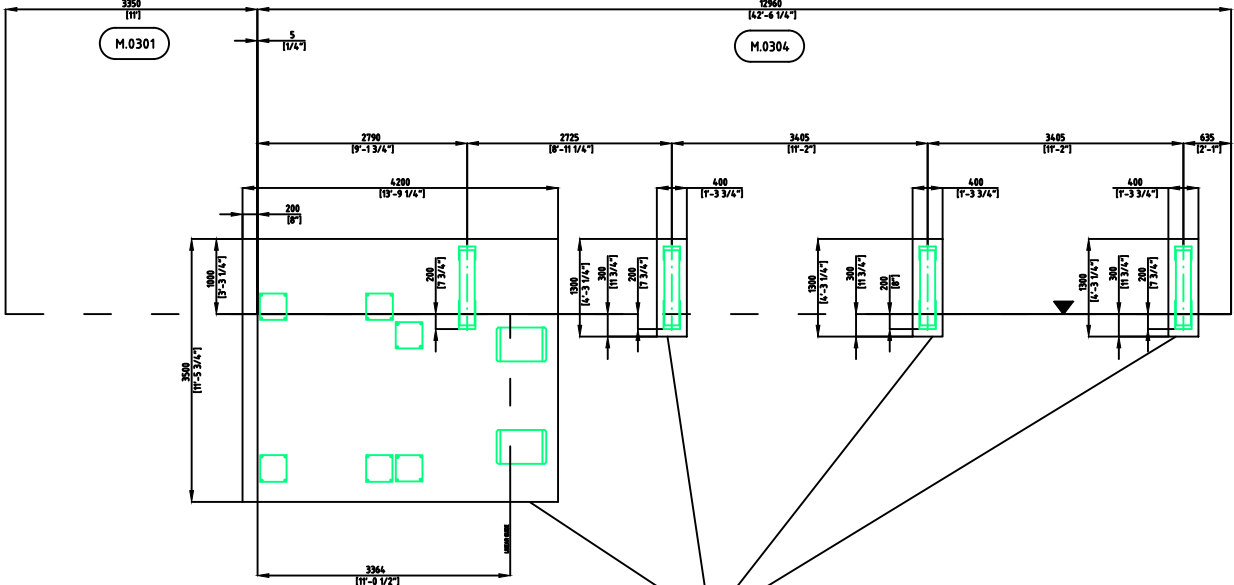

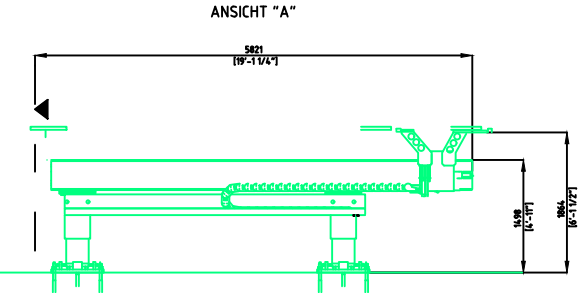


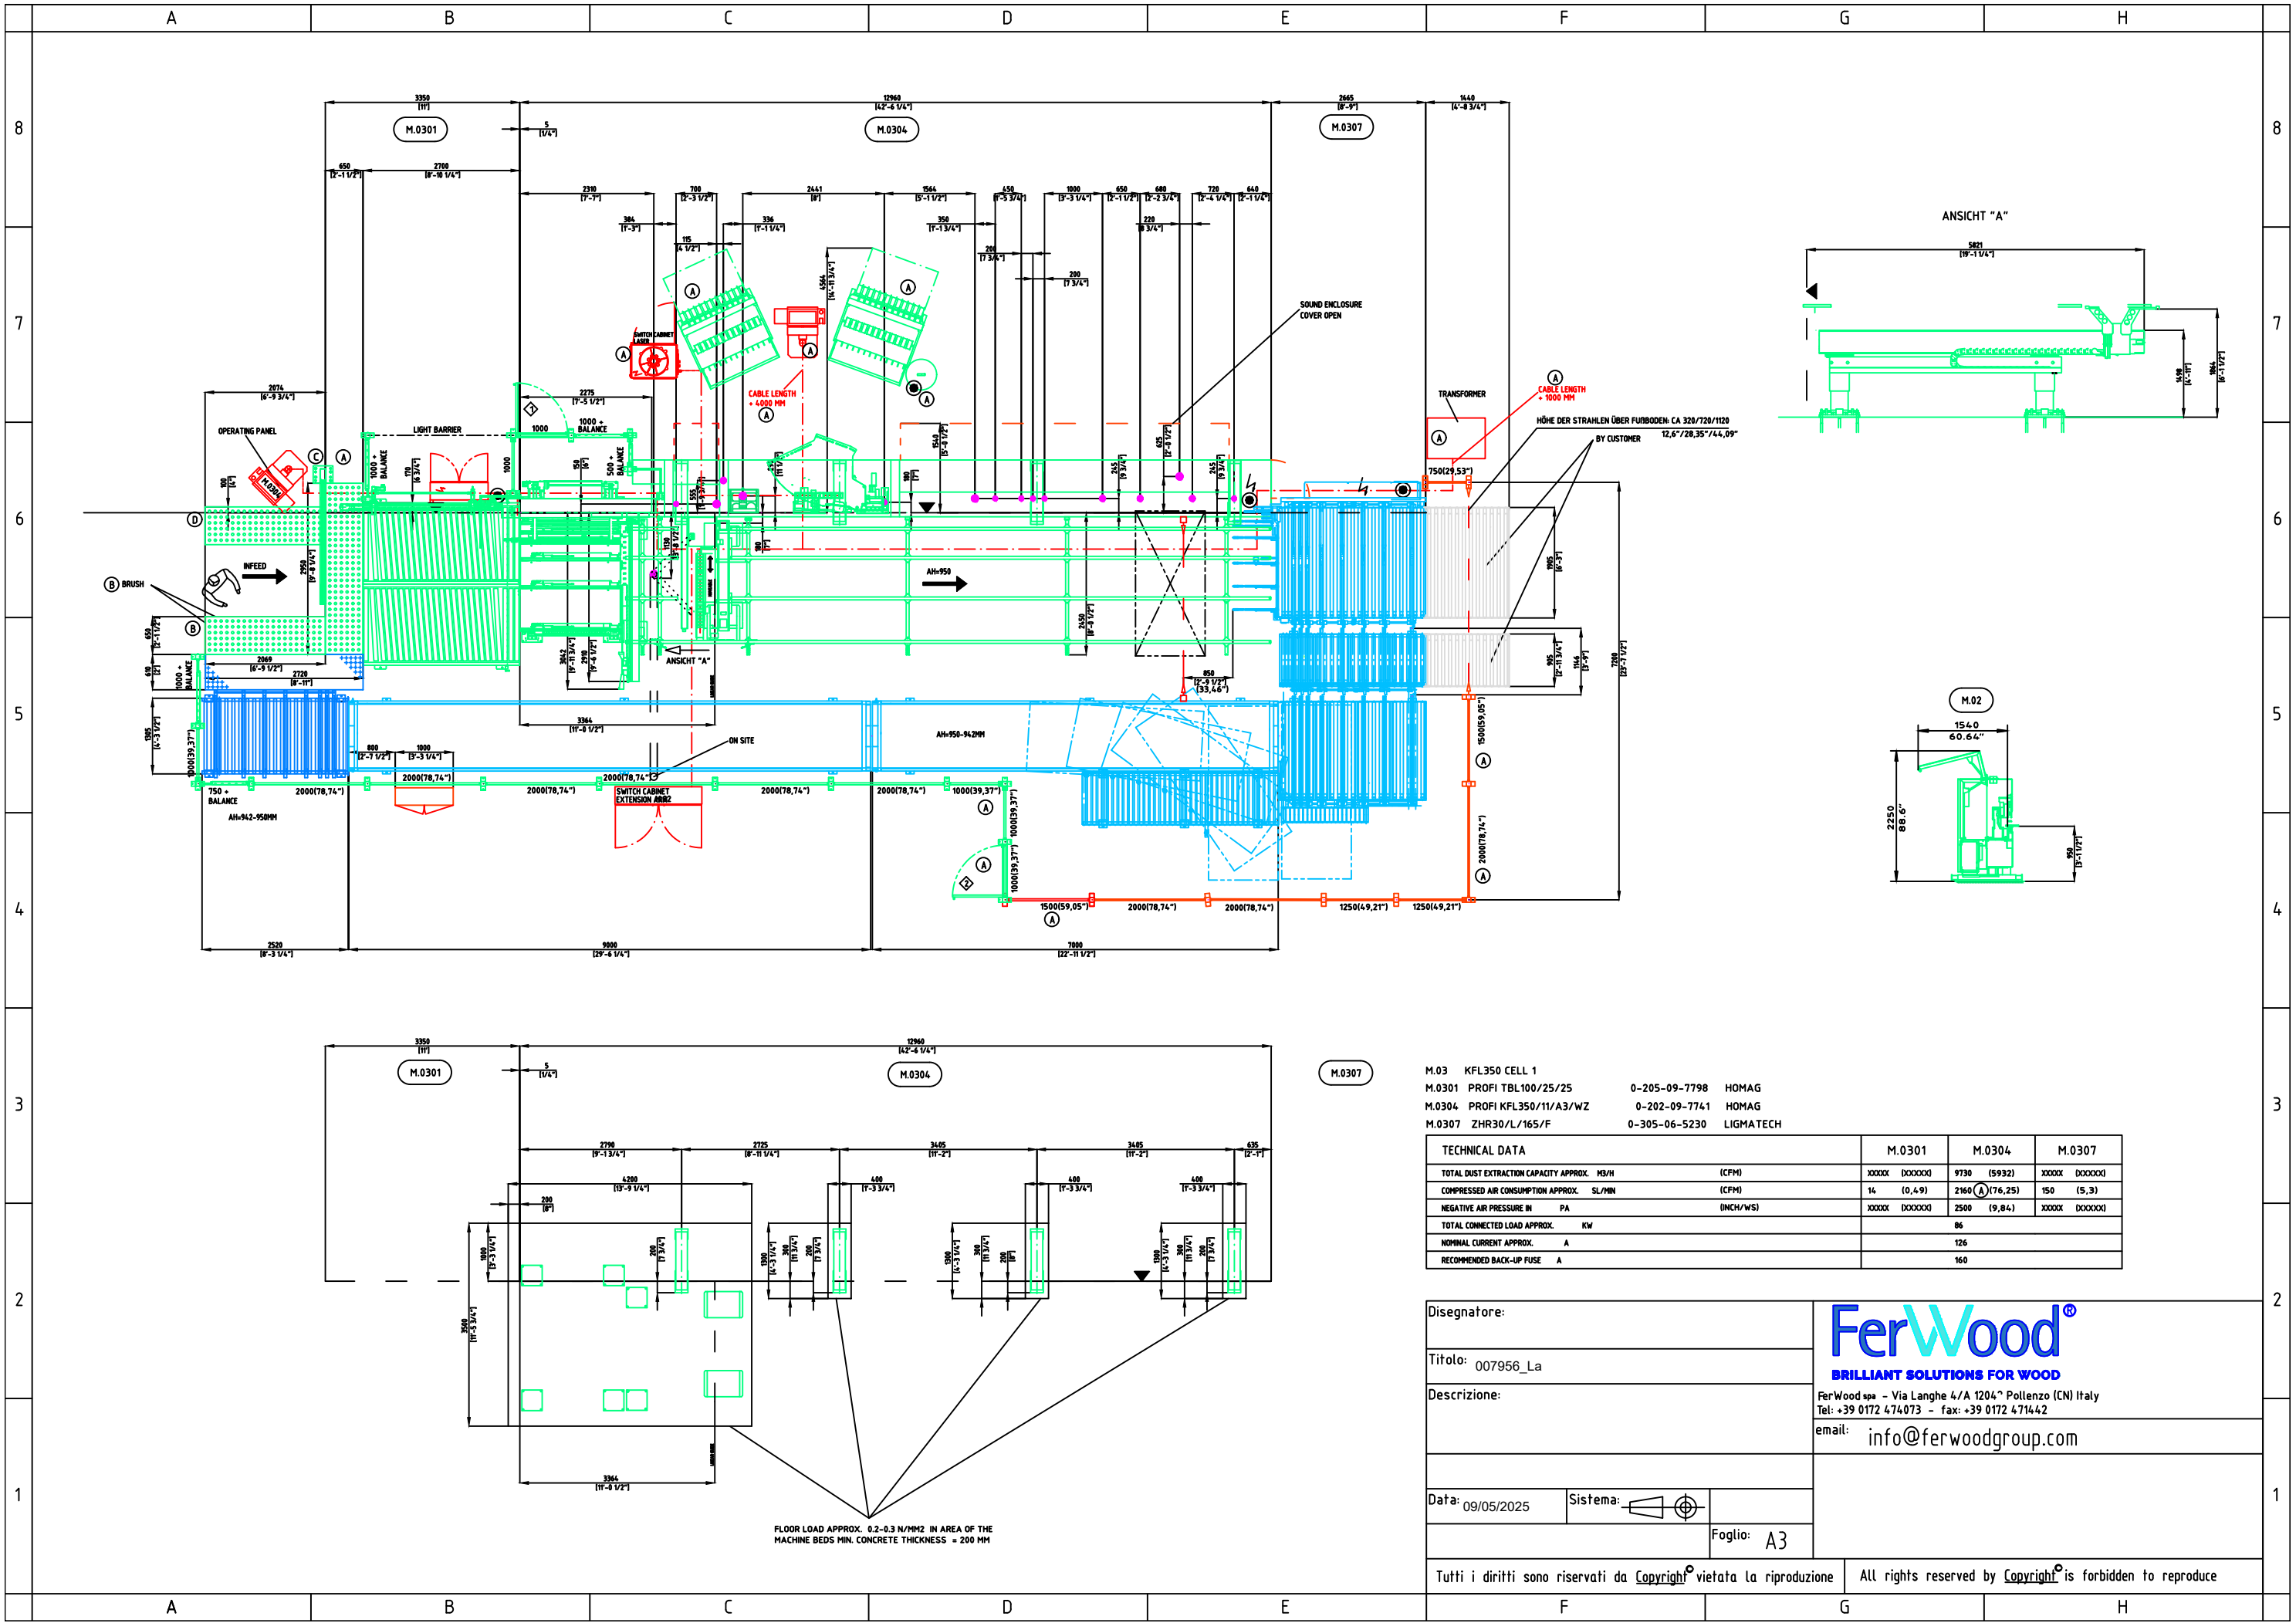

FLOOR LOAD APPROX. 0.2-0.3 N/MM2 IN AREA OF THE MACHINE BEDS MIN. CONCRETE THICKNESS = 200 MM

- M.03 KFL350 CELL 1
- M.0301 PROFI TBL100/25/25 0-205-09-7798 HOMAG
- M.0304 PROFI KFL350/11/A3/WZ 0-202-09-7741 HOMAG
- M.0307 ZHR30/L/165/F 0-305-06-5230 LIGMATECH

TECHNICAL DATA	M.0301	M.0304	M.0307
TOTAL DUST EXTRACTION CAPACITY APPROX. M3/H (CFM)	XXXXX (XXXXX)	9730 (5932)	XXXXX (XXXXX)
COMPRESSED AIR CONSUMPTION APPROX. SL/MIN (CFM)	14 (0,49)	2160 (A) (76,25)	150 (5,3)
NEGATIVE AIR PRESSURE IN PA (INCH/WS)	XXXXX (XXXXX)	2500 (9,84)	XXXXX (XXXXX)
TOTAL CONNECTED LOAD APPROX. KW	86		
NOMINAL CURRENT APPROX. A	126		
RECOMMENDED BACK-UP FUSE A	160		

Disegnatore:

Titolo: 007956_La

Descrizione:

Data: 09/05/2025 Sistema: Foglio: A3

FerWood®
BRILLIANT SOLUTIONS FOR WOOD
FerWood spa - Via Langhe 4/A 1204^ Pollenzo (CN) Italy
Tel: +39 0172 474.073 - fax: +39 0172 4714.42
email: info@ferwoodgroup.com