
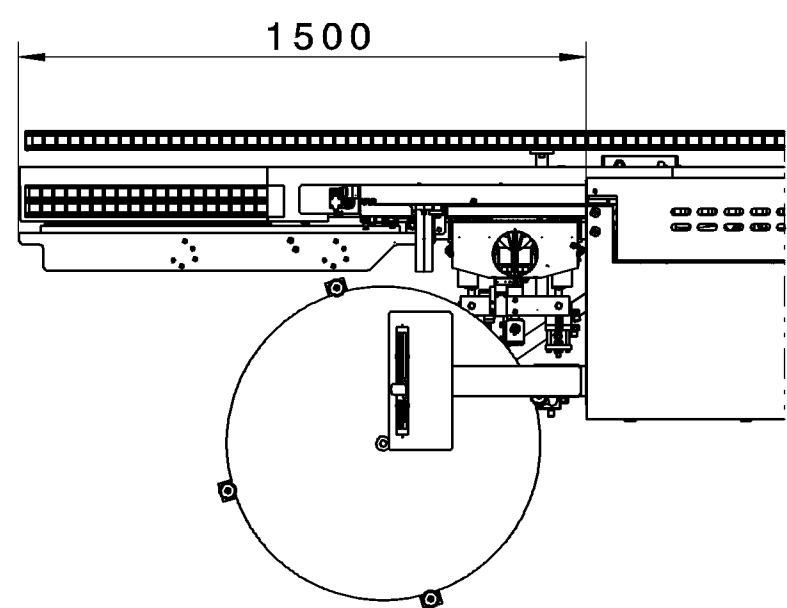


	NEPA-STUECKKANTEN DIN ISO 13715	DUSTOLERANZEN DIN 1680
	10,3 () 	QTA 18 STANDARD GUSS- RORTEILE QTA 17 FEINGUSS

LISTE DE RECOMMANDATIONS:						
	QUERSCHNITTS- FLAECHEN ..MM²/2					
FUSIBLE	16 A	20 A	25 A	35 A	50 A	63 A
LONGUEUR DE CONDUITE						
- 10 M	2.5 MM²	2.5 MM²	4.0 MM²	6.0 MM²	10.0 MM²	16.0 MM²
10 - 20 M	2.5 MM²	4.0 MM²	4.0 MM²	6.0 MM²	10.0 MM²	16.0 MM²
20 - 30 M	2.5 MM²	4.0 MM²	6.0 MM²	10.0 MM²	16.0 MM²	16.0 MM²

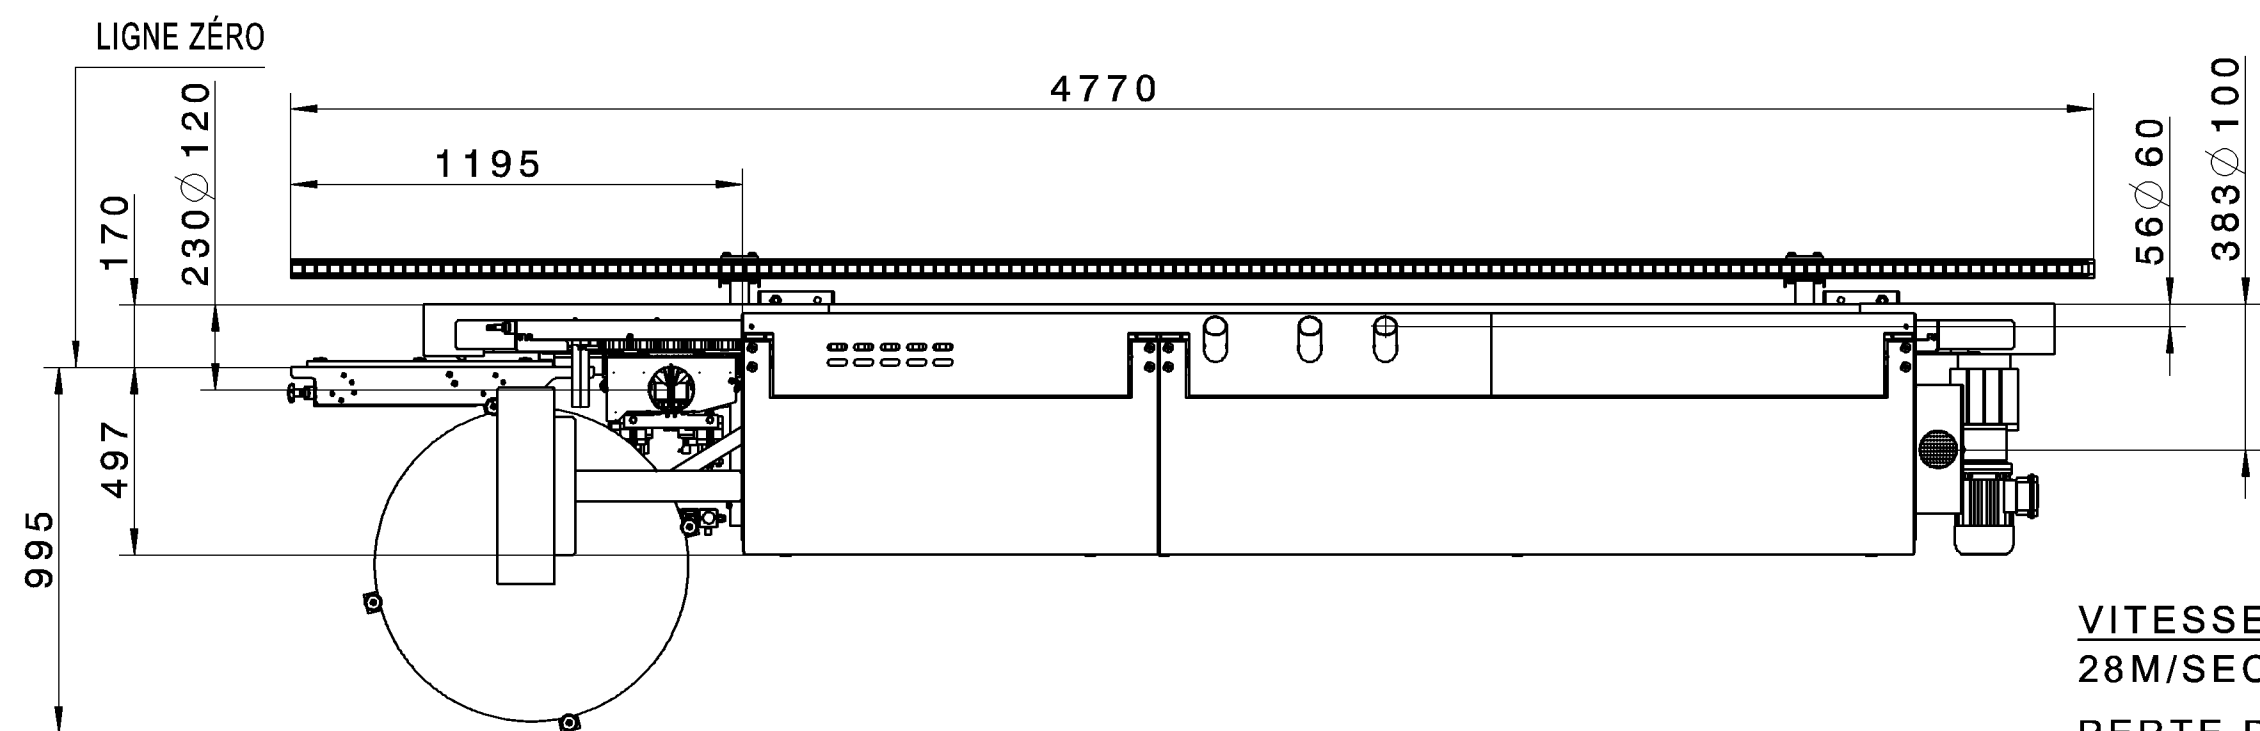


+300
RALLONGEMENT
ENTREE
OPTION

VITESSE L'AIR
28M/SEC

PERTE DE PRESSION
CA. 2000PA

CONSOMMATION D'AIR

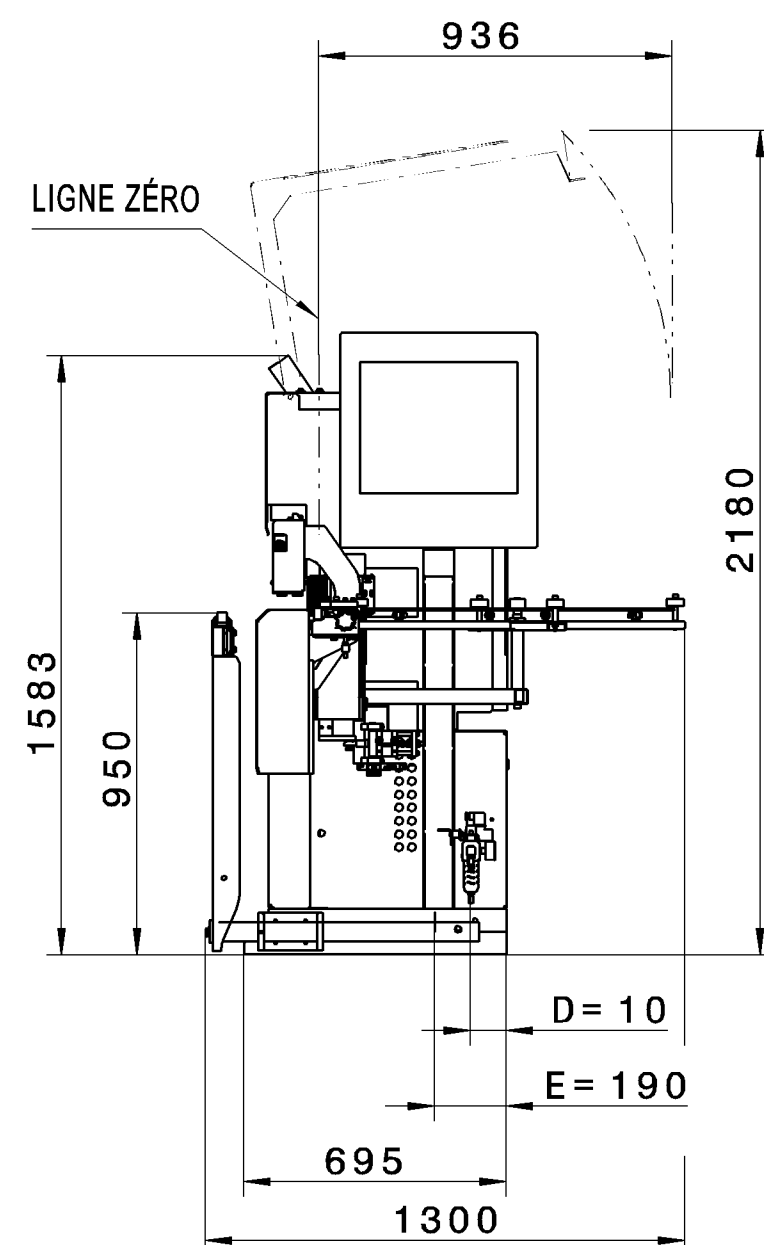

E= ALIMENTATION SECTEUR DE LA MACHINE
TENSION DE SERVICE
400V - 3PH - 50HZ
PRESSION DE SERVICE
12KW
COURANT NOMINAL
17A
POIDS
CA. 1600KG

D= ALIMENTATION EN AIR COMPRIME
6BAR / ø1/2"

CAPACITE D'ASPIRATION

* *
ø60MM 285M3/H
ø100MM 790M3/H
ø120MM 1140M3/H

	PROJECT:	
	CODE:	006181_MA
	TYPE:	SINGLE SIDED EDGEBANDER
	BRAND:	BRANDT O KDF 430 C
	DESIGNER:	
	DATE:	
FILE:		