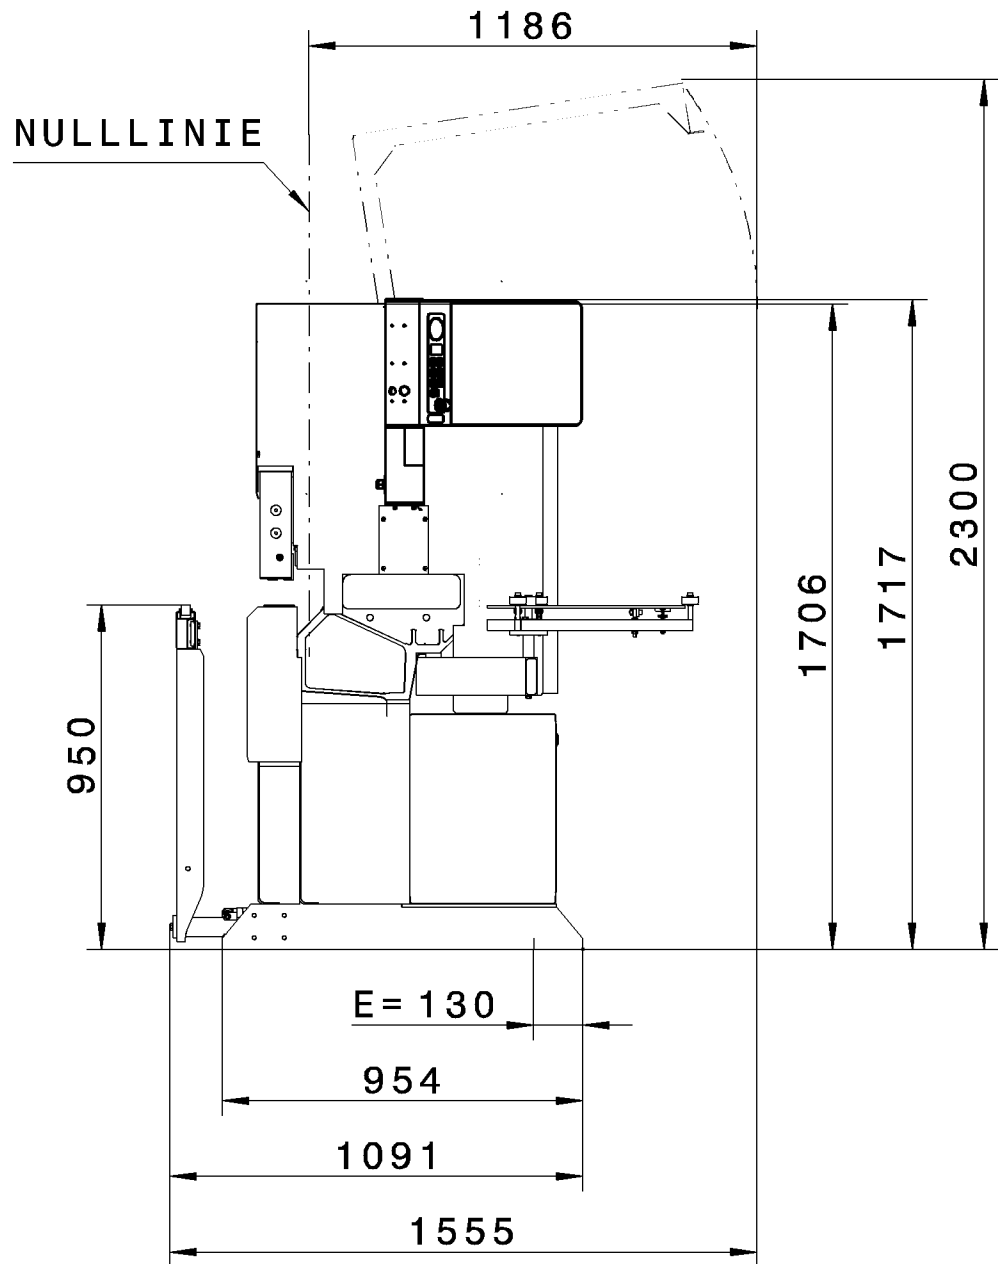


	Passmaß	Abmaß
--	---------	-------

EMPFOHLENE VORSICHERUNG						
	QUERSCHNITTS- FLAECHE ..MM2					
SICHERUNG	16 A	20 A	25 A	35 A	50 A	63 A
LEITUNGSLAENGE						
- 10 m	2.5 mm ²	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
10 - 20 m	2.5 mm ²	4.0 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
20 - 30 m	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²	16.0 mm ²


$$E = \frac{\text{ELEKTROANSCHLUSS}}{\text{BETRIEBSSPANNUNG}}$$

400V - 3PH - ((+N)) - 50HZ

GESAMTANSCHLUSSWERT
24 KW

NENNSTROM
35 A

GEWICHT
CA. 2600KG

D= DRUCKLUFTANSCHLUSS
6BAR / ϕ 1 / 4 "

GESAMTABSAUGELEISTUNG
3480 M3/H




LUFTGESCHWINDIGKEIT
28M / SEC

DRUCKVERLUST
CA. 2000 PA

LUFTVERBRAUCH
350 Nl/min

MASCHINENNUMMER: 0 - 261 - 08 - 2368

				M	WERKSTOFF -		 BRANDT	
				1:20	GUSSMODELL			
AB	AEND.NR.	DATUM	NAME	<u>α</u>	kg	☐		dm²
	Datum		NAME					
BEARB.	29.02.2016		Pauls, C.					ZEICHNUNGS-NR.
KTRL.	29.02.2016							5 - 701 - 80 - 4365
ISO 2768 mK-E				AUFSTELLPLAN O KDF 650 AT 0-261-08-2368				
EN ISO 13920 -BE								
				A2				
				(C) Copyright reserved				

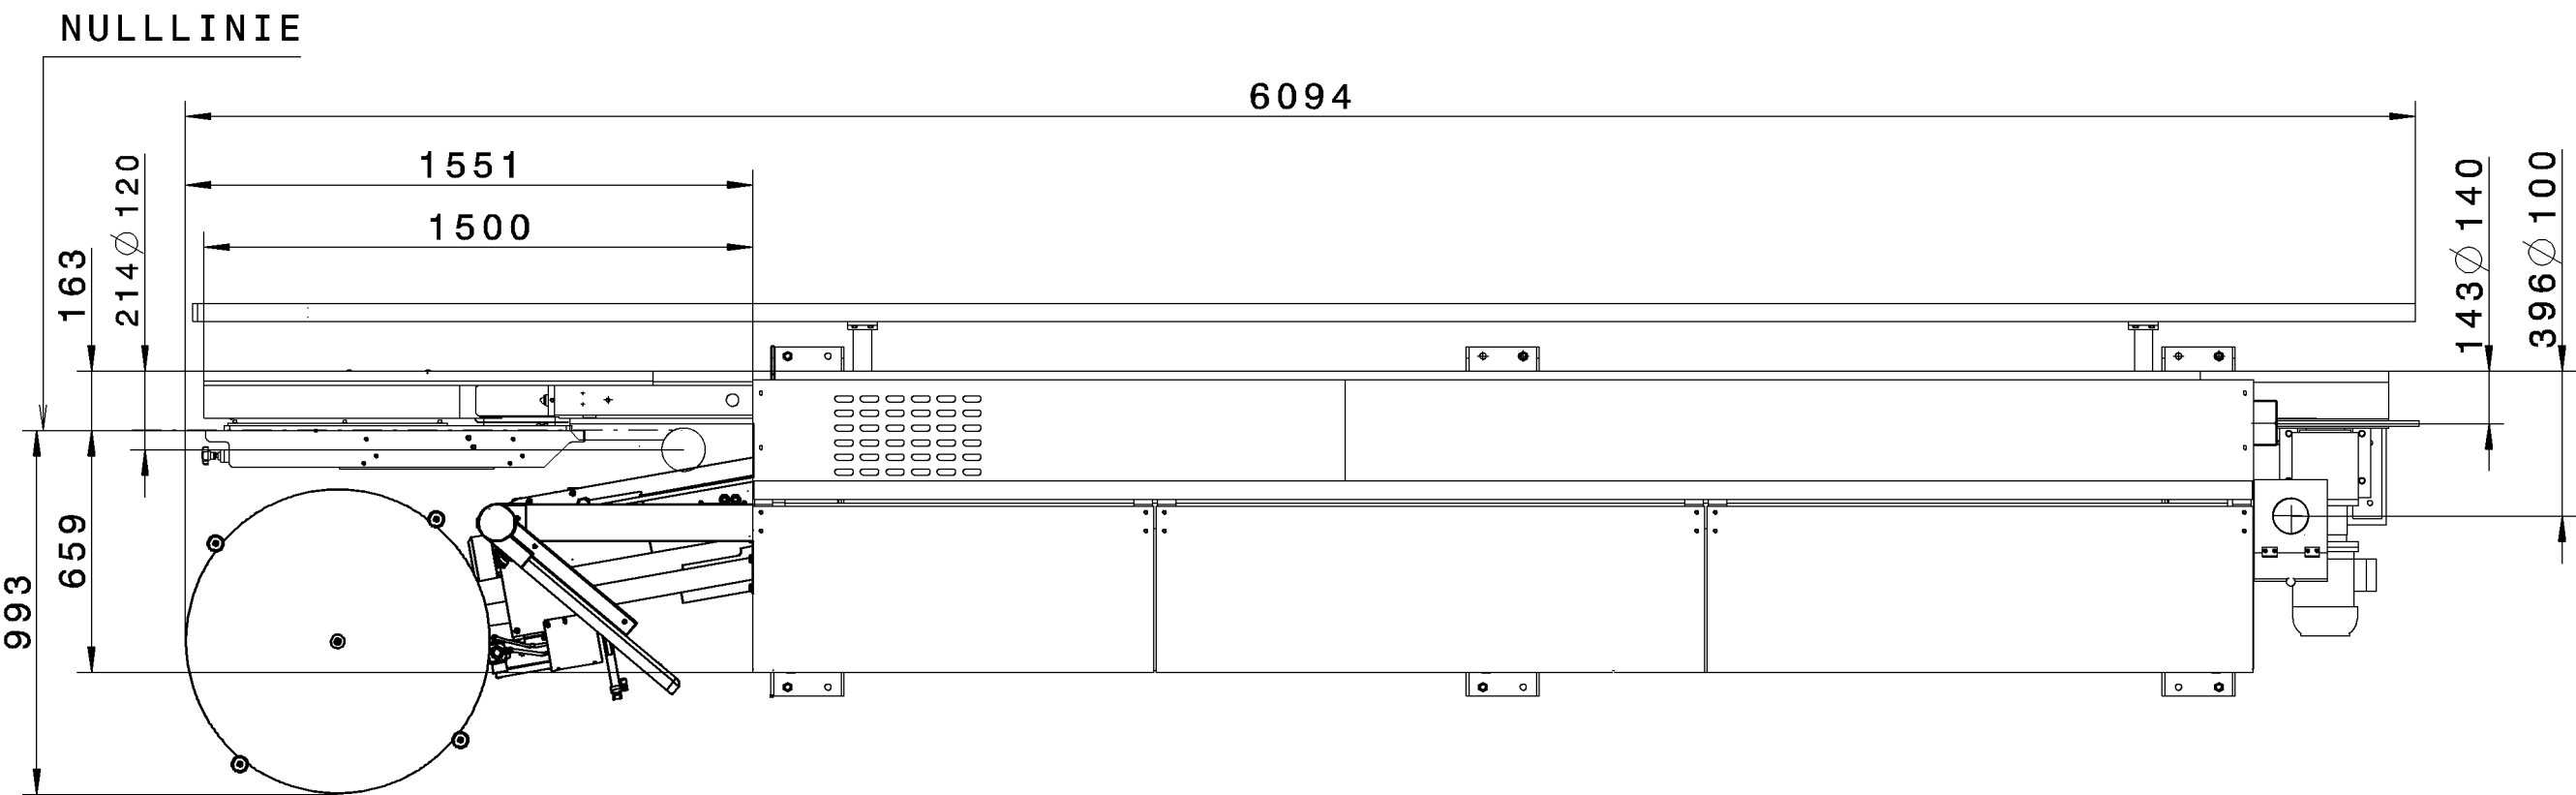

PROJECT:	
CODE:	005769_MA
TYPE:	SINGLE SIDED EDGE BANDER
BRAND:	BRANDT KDF 650
DESIGNER:	
DATE:	
FILE:	