
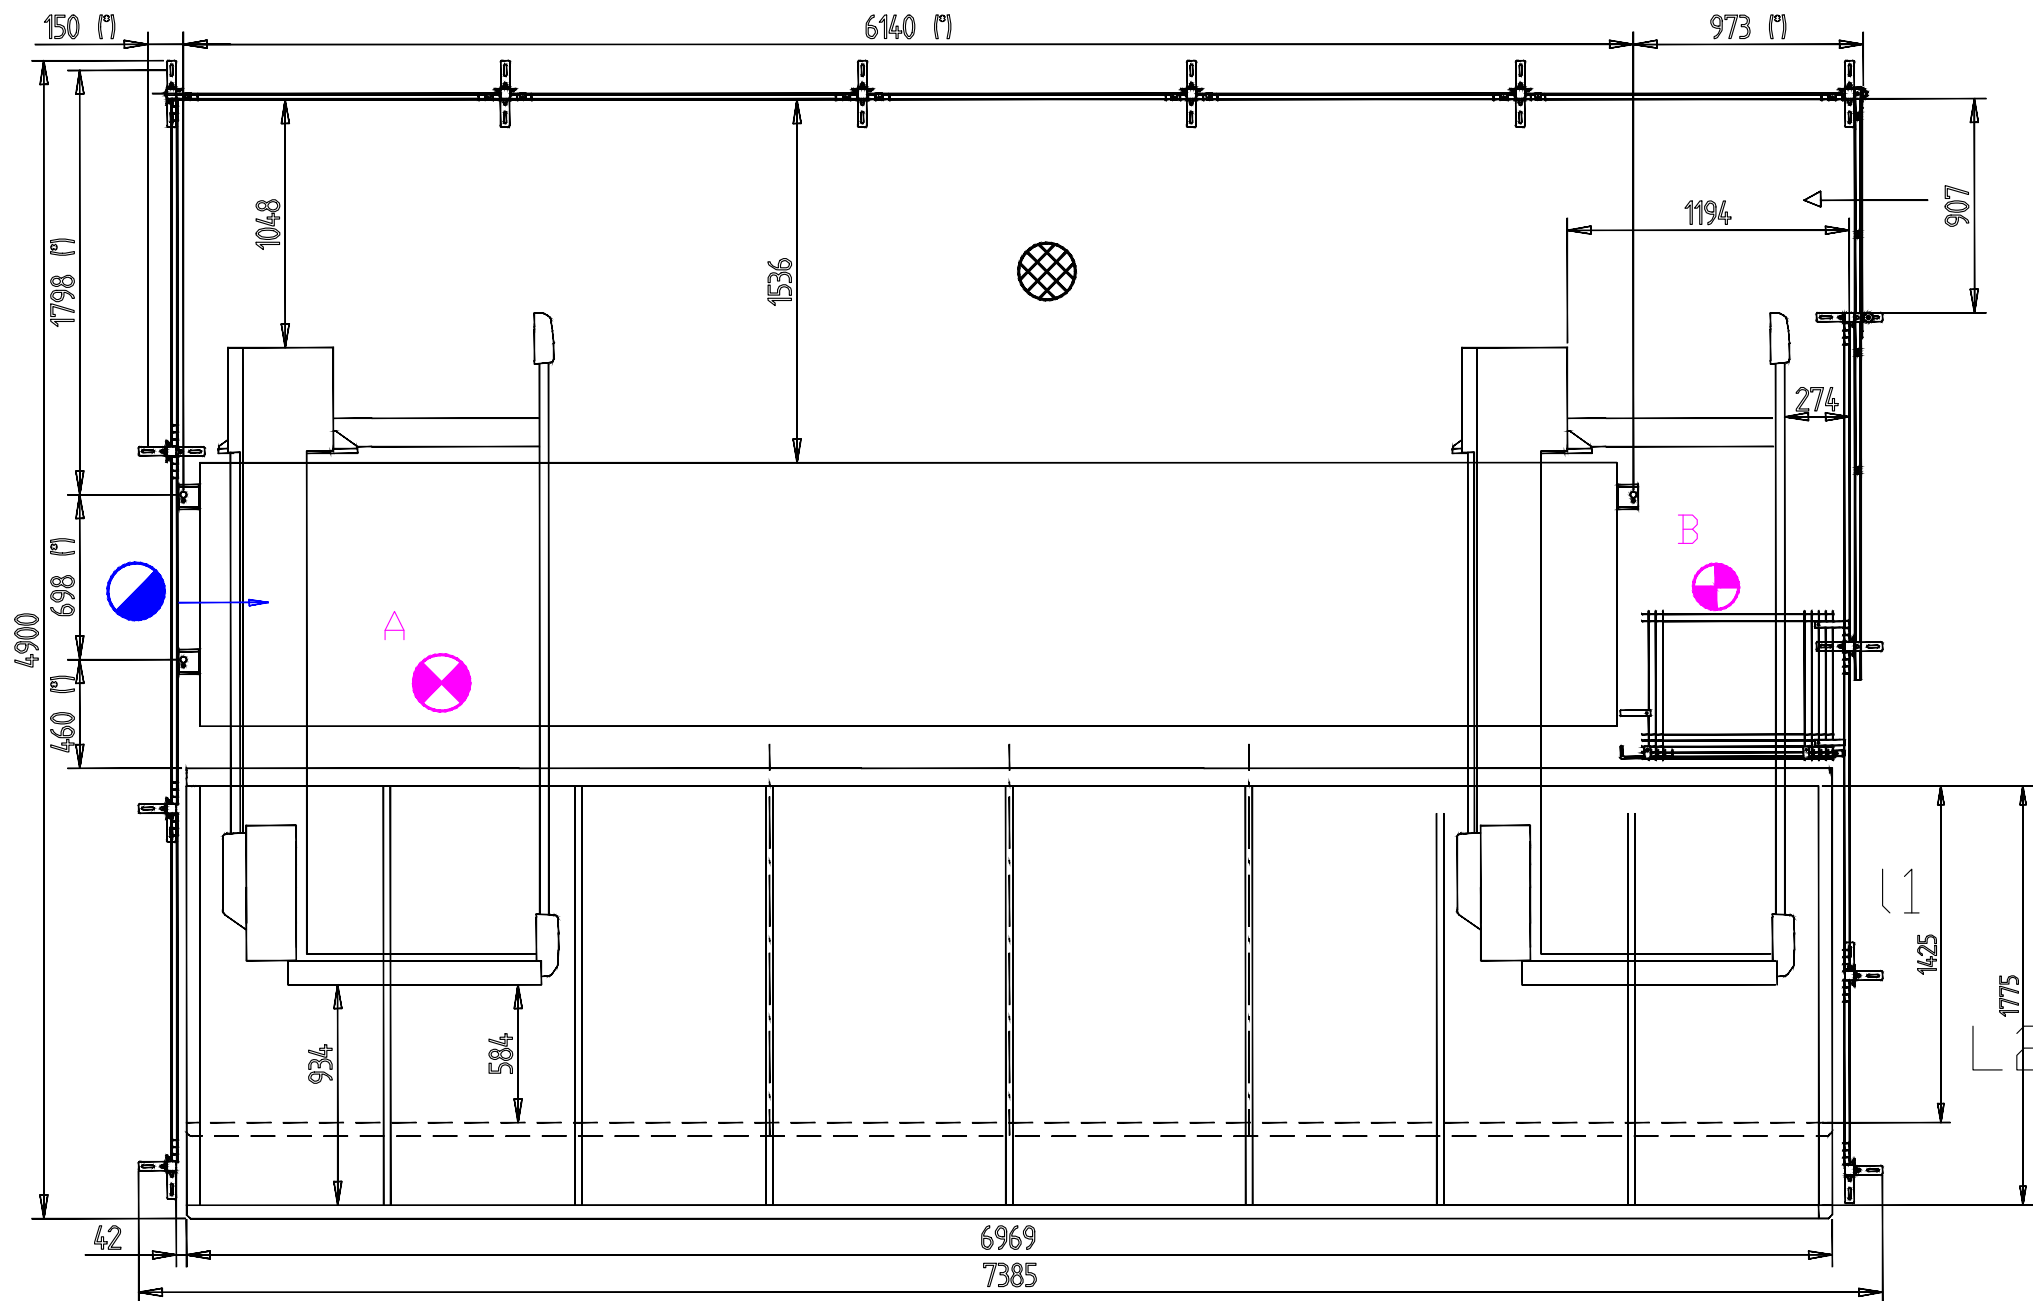




(*)	Position of bores anchoring the machine to the floor.
	Connection point to the compressed air system: 3/8"; pipe with min. internal diameter 15mm; minimum pressure 7.5 bar; height from the ground 500mm.
	Connection point for suction system. - A - main manifold: diameter 250mm; height from the ground 2550mm; - B - waste material container: height from the ground 490mm. - C - unloader manifold: diameter 2350mm.
	Location of the vacuum pump.
L1	Contact mat for non-EC version of machine.
L2	Contact mat for EC version of machine.

Disegnatore: FerWood spa		FerWood® BRILLIANT SOLUTIONS FOR WOOD FerWood spa - Via Langhe 4/A 1204^ Pollenzo (CN) Italy Tel: +39 0172 474073 - fax: +39 0172 471442 email: info@ferwoodgroup.com
Titolo: 006257_MA		
Descrizione: CNC Working Center BIESSE ROVER B 4.50 ATS		
Data:	Sistema: 	Foglio: A3
Tutti i diritti sono riservati da Copyright. È vietata la riproduzione		All rights reserved by Copyright. It is forbidden to reproduce
F	G	H