
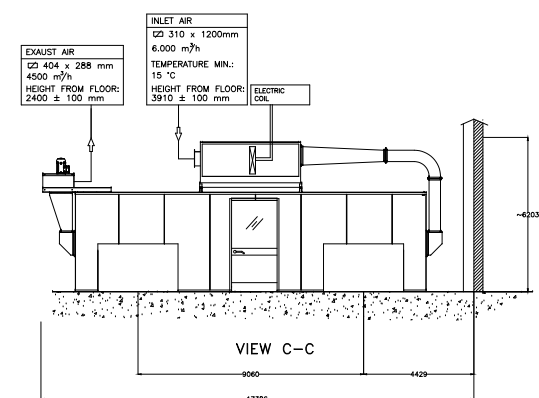


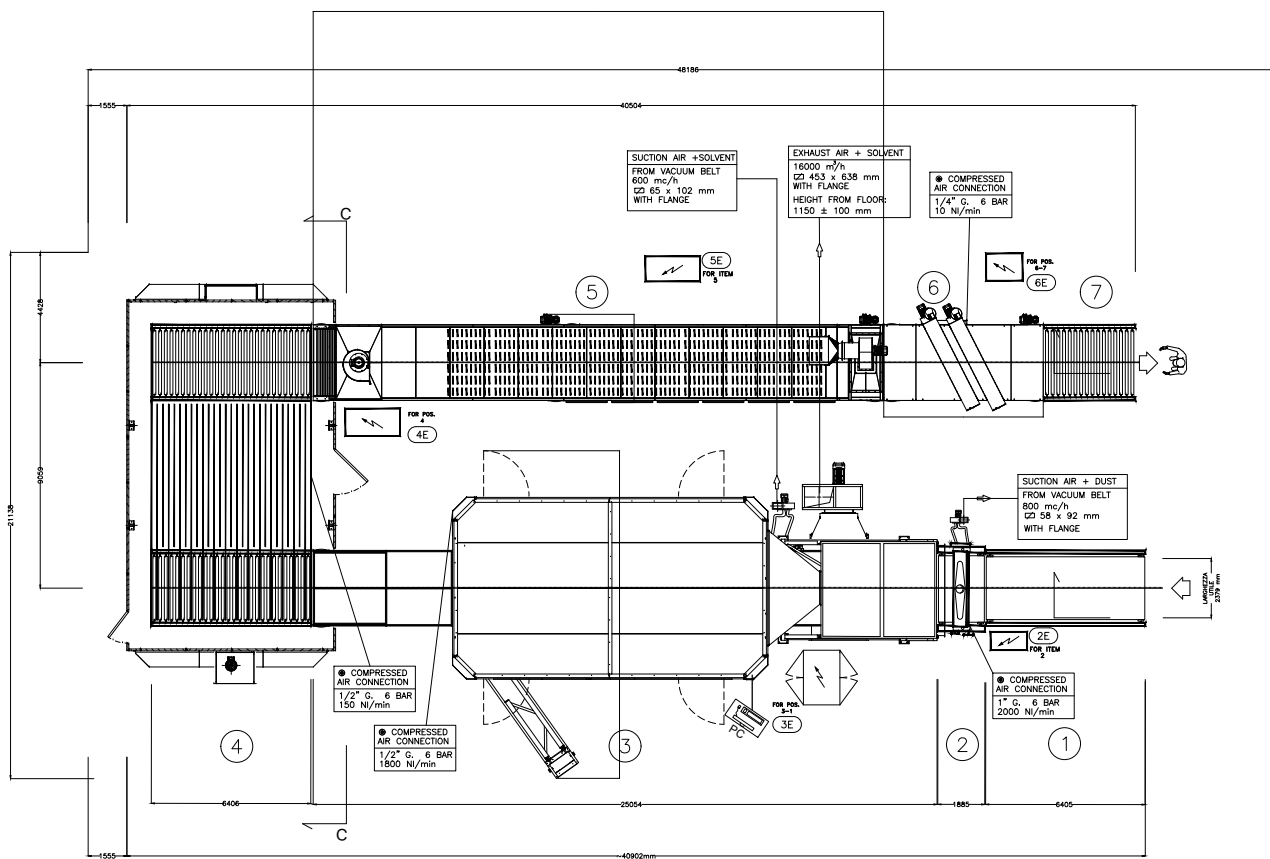

TECHNICAL SPECIFICATIONS:				1	2	2E FOR ITEM 2	3	3E FOR ITEM 3-1	4	4E FOR ITEM 4	5	5E FOR ITEM 5	6	6E FOR ITEM 6-7	7
LINE SPEED:	(m/min)	(Pos.1-3 V=8 m/min) (Pos. 3-4 V=15 m/min) (po.4-7 V=3 m/min)													
PANELS LOAD DIMENSION:	(mm)	LENGTH: MIN 300 MAX 3000 mm WIDTH: MIN 40 MAX 1300 mm TICKNESS: MIN 10 MAX 100 mm													
PRIMARY VOLTAGE:	(V, Hz)	400 V - 50 Hz ±5% (L1, L2, L3, N, PE)													
CURRENT:	(A)			/	/	11,5	/	65	/	121	/	97	/	/	/
INSTALLED POWER:	(kW)			/	/	4,3	/	34	/	72,4	/	55,1	/	/	/
COMPRESSED AIR CONSUMPTION:	(Ml/min)			/	2000	/	1800	/	150	/	/	/	10	/	/
COLOR:		RAL 9002													
WORKING HEIGHT:	(mm)	900 ± 20 mm													
ALL PLANTS, PIPING AND CONNECTIONS FOR COMPRESSED AIR, FAN AIR (INLET – EXHAUST), DUST SUCTION, ENERGY MEDIUM ELECTRICAL CABLES (LAIS DOWN IN CABLE TRAYS) BETWEEN MAIN LINE AND CABINETS MUST BE SUPPLIED BY CUSTOMER FOR INSTALLATION. THESE TECHNICAL DATA HAVE TO BE CONSIDERED AS INDICATIVE, ELMAG S.p.a. RESERVE THE RIGHT TO MAKE CHANGES AT ANY TIME.															

Disegnatore: Ferwood SPA

Titolo: 008047_MA

Descrizione:

Data:

Sistema:

Foglio: A3

FerWood®
BRILLIANT SOLUTIONS FOR WOOD
FerWood srl - Via Langhe 4/A 12044 Pollenzo (CN) Italy
Tel: +39 0172 474073 - fax: +39 0172 471442
email: info@ferwoodgroup.com

Tutti i diritti sono riservati da Copyright vietata la riproduzione

All rights reserved by Copyright is forbidden to reproduce