
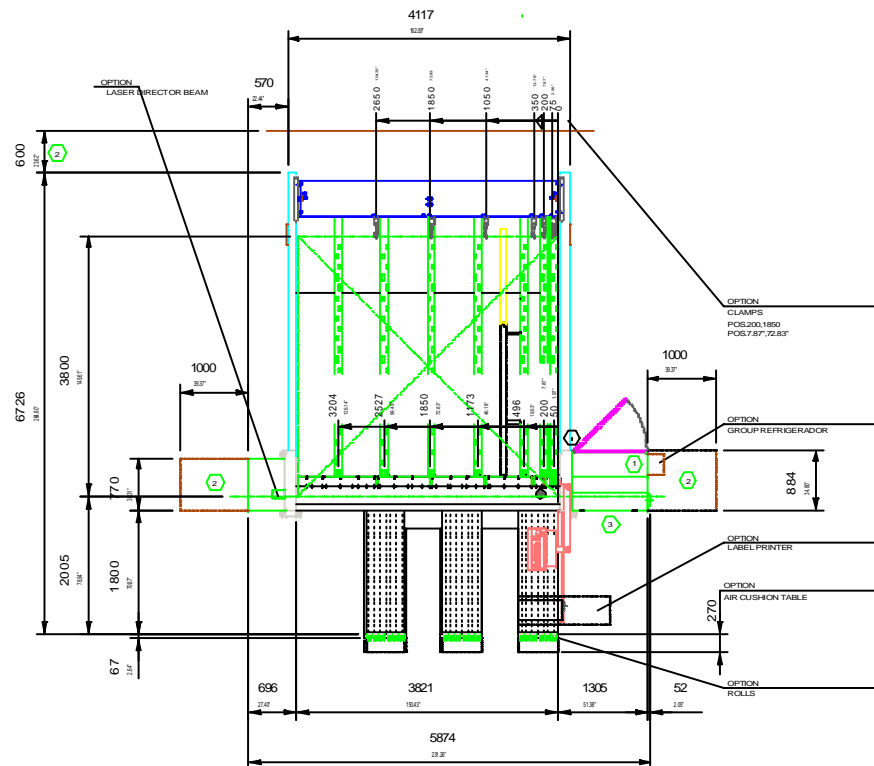
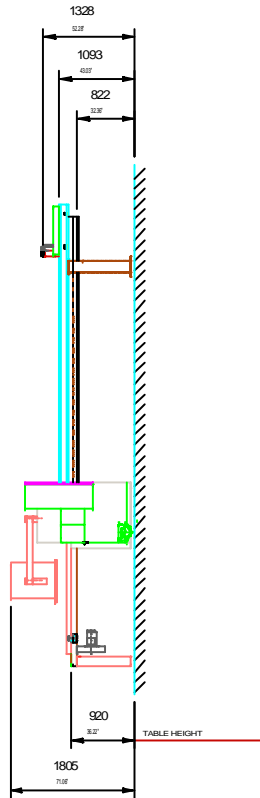


ISO-TOL	TOLERANZA

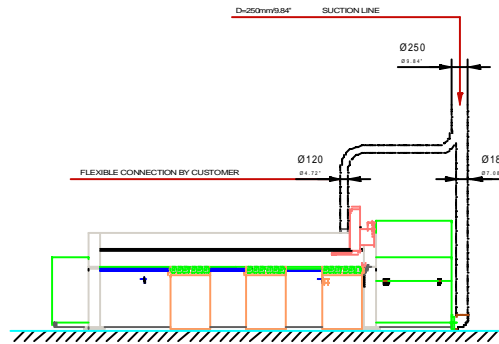

TYPE	HPP230 38/38		
FOR APPROVAL:	DATE: _____ SIGNED: _____		
VERIFIED:	DATE: _____ SIGNED: _____		
	PLEASE RETURN THE APPROVED DRAWING IMMEDIATELY, OTHERWISE DELIVERY MAY BE DELAYED		
	SUBJECT TO CONSTRUCTIVE MODIFICATIONS WITHOUT OUR PERMISSION THIS DRAWING MUST NOT BE REPRODUCED OR USED BY THIRD PARTIES OR COMPETITORS		
	EN-11	LAW OF	19.06.1901
	1	MAIN ELECTRICAL CONNECTION	
	2	SPACE REQUIREMENT MAINTENANCE	
	3	ROOM FOR SAW BLADE CHANGE	
	4	PNEUMATIC CONNECTION 1/2" SUPPLY 2"	
	X	DUST-COLLECTOR MUFF	
	5	SAFETY LIGHT BARRIER	
	CONCRETE QUALITY B25 CAPABLE OF BEARING PRESSURE AND TENSION		
	THICKNESS OF CONCRETE MIN. 200 MM (7.9")		
	EVENNESS OF FLOOR: TOLERANCE +/- 10MM (+/- 0.4")		
	GROUTING BY CUSTOMER OF THE MOUNTING PLATES WITH CASTING COMPOUND RESISTANT TO SHRINKING AFTER INSTALLATION		
	REPRESENTATION AND DIMENSIONING OF INSTALLATIONS PROVIDED BY THE CUSTOMER AND MACHINES OF FOREIGN BRAND WITHOUT GUARANTEE		
	MAXIMUM PANEL SIZE	3800 x 3000 mm	149.61 x 149.61"
	MINIMUM PANEL SIZE	... x ... mm	... x ..."
	SAW BLADE PROJECTION	55 mm	2.17"
	CUTTING LENGTH HP-SAW	3800 mm	149.61"
	CUTTING LENGTH TRIM SAW
MAIN SAW MOTOR	5.5 KW	TOTAL CONNECTED LOAD	10.2 KW
MAIN SAW MOTOR	7.5 KW	TOTAL CONNECTED LOAD	12.2 KW
AIR PRESSURE REQUIRED *		6 bar	97 psi
TOTAL AIR REQUIREMENTS FOR 1bar/14.5psi		100 Nl/min	52.5 CFM
SUCTION CAPACITY		400 m³/h	258 CFM
AIR VELOCITY		26 m/s	85.26 feet/s

21/11/2024
 "HOMAG non si assume alcuna responsabilità circa la corrispondenza della composizione attuale della macchina rispetto alla descrizione del layout"

Disegnato:	Ferwood spa	
Firma:	007686	
Disegnato:	DRAFT	<small>WILLIAM WOODWARD PIRELLA GÖTTSCHE LOWE</small> <small>via S. Pietro 17A 00147 Roma (RM) Italy</small> <small>tel. +39 06 5710171 fax +39 06 5710172</small> <small>email info@ferwoodgroup.com</small>
Data:	06/12/2024	
	pagina 33	

Tutti i diritti sono riservati da Copyright. È vietata la riproduzione. All rights reserved by Copyright. Forbidden to reproduce.