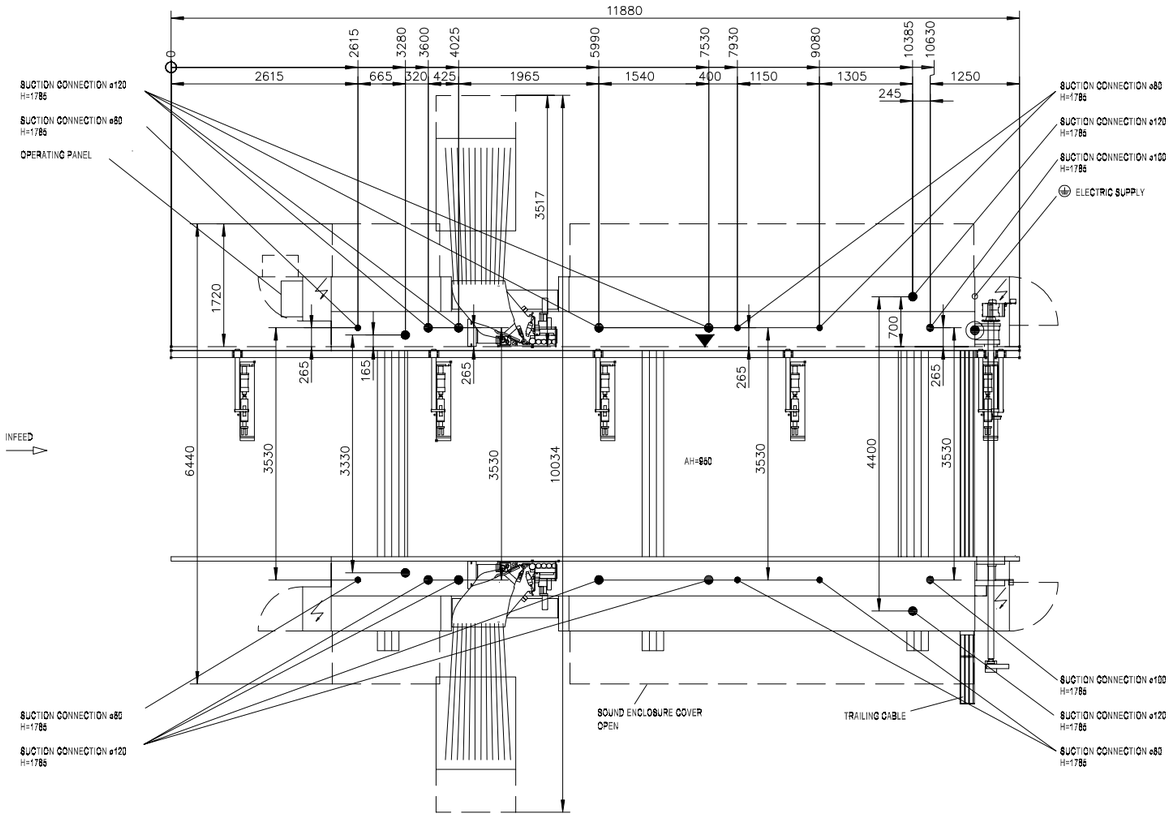



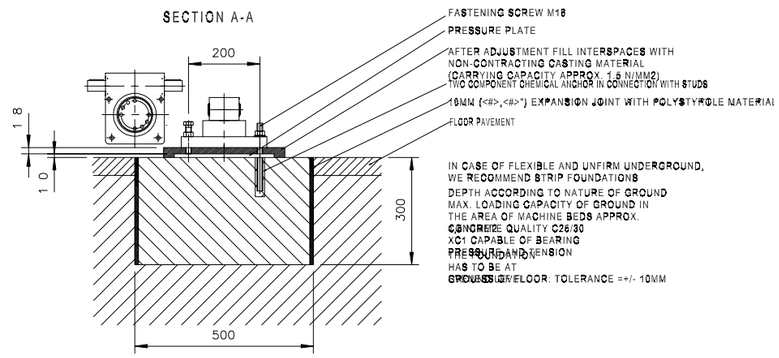

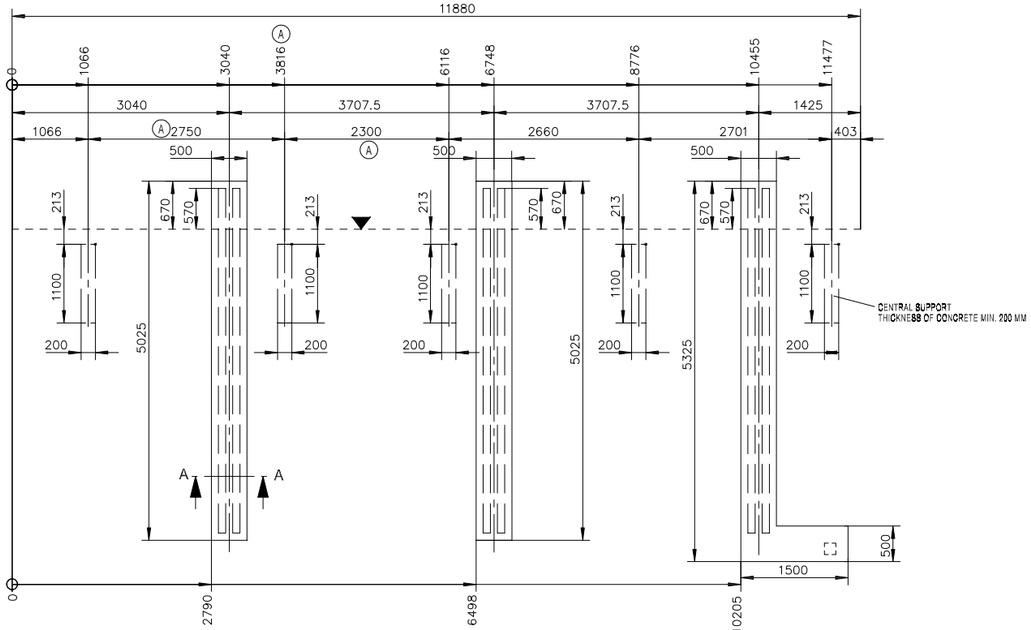

KOM.: POITOU	WITHOUT OUR PERMISSION THIS DRAWING MUST NOT BE REPRODUCED NOR DUPLICATED NOR MADE ACCESSIBLE TO THIRD PARTIES OR COMPETITORS
MASCH.TYPE.: O KFL526/9/A3/30	
MASCH.NR.: 0-202-48-3155	

WORKING HEIGHT 950MM

TECHNICAL DATA

TOTAL DUST EXTRACTION CAPACITY APPROX. M3/H	18320
AIR VELOCITY M/SEC	28
COMPRESSED AIR CONSUMPTION APPROX. SL/MIN	2240
NEGATIVE AIR PRESSURE IN PA	2500
TOTAL CONNECTED LOAD APPROX. KW	84
NOMINAL CURRENT APPROX. A	147
RECOMMENDED BACK-UP FUSE A	200

ELECTRICAL GROUNDING POINT - MACHINE FUNCTION NOT GUARANTEED WITHOUT PROPER GROUNDING IN ACCORDANCE WITH LOCAL ELECTRICAL CODES
ELECTRICAL RESISTANCE <3Ω
PROTECTIVE CIRCUIT IS ONLY PERMISSIBLE IN COMBINATION WITH AN ALL-CURRENT-SENSITIVE/SELECTIVE FI-PROTECTIVE SWITCH

OUTER EDGE OF CHAIN TRACK RESP. FIXED EDGE WORKPIECE OVERHANG 0

CONNECTION FOR COMPRESSED AIR WITH HOSE 3/4" (INSIDE DIAMETER 19MM)
SUPPLY Q 1"
AIR PRESSURE IN SUPPLY LINE MIN. 7 BAR
STANDARD COMPRESSED AIR QUALITY ACCORDING TO ISO 8573- 1
QUALITY CLASS
SOLID IMPURITIES CLASS 3
WATER CONTENT CLASS 4
TOTAL OIL CONTENT CLASS 3

Disegnatore: FerWood s.p.a.

Titolo: 008412_La

Descrizione: HOMAG OPTIMAT KFL526/9/A3/30

Data: 03/04/2026 Sistema: Foglio: A3

FerWood®
BRILLIANT SOLUTIONS FOR WOOD
FerWood spa - Via Langhe 4/a 12042 Pollenzo (CN) Italy
Tel. +39 0172 474073 - Fax. +39 0172 471442
email: info@ferwoodgroup.com

Tutti i diritti sono riservati da Copyright vietata la riproduzione
All rights reserved by Copyright is forbidden to reproduce