


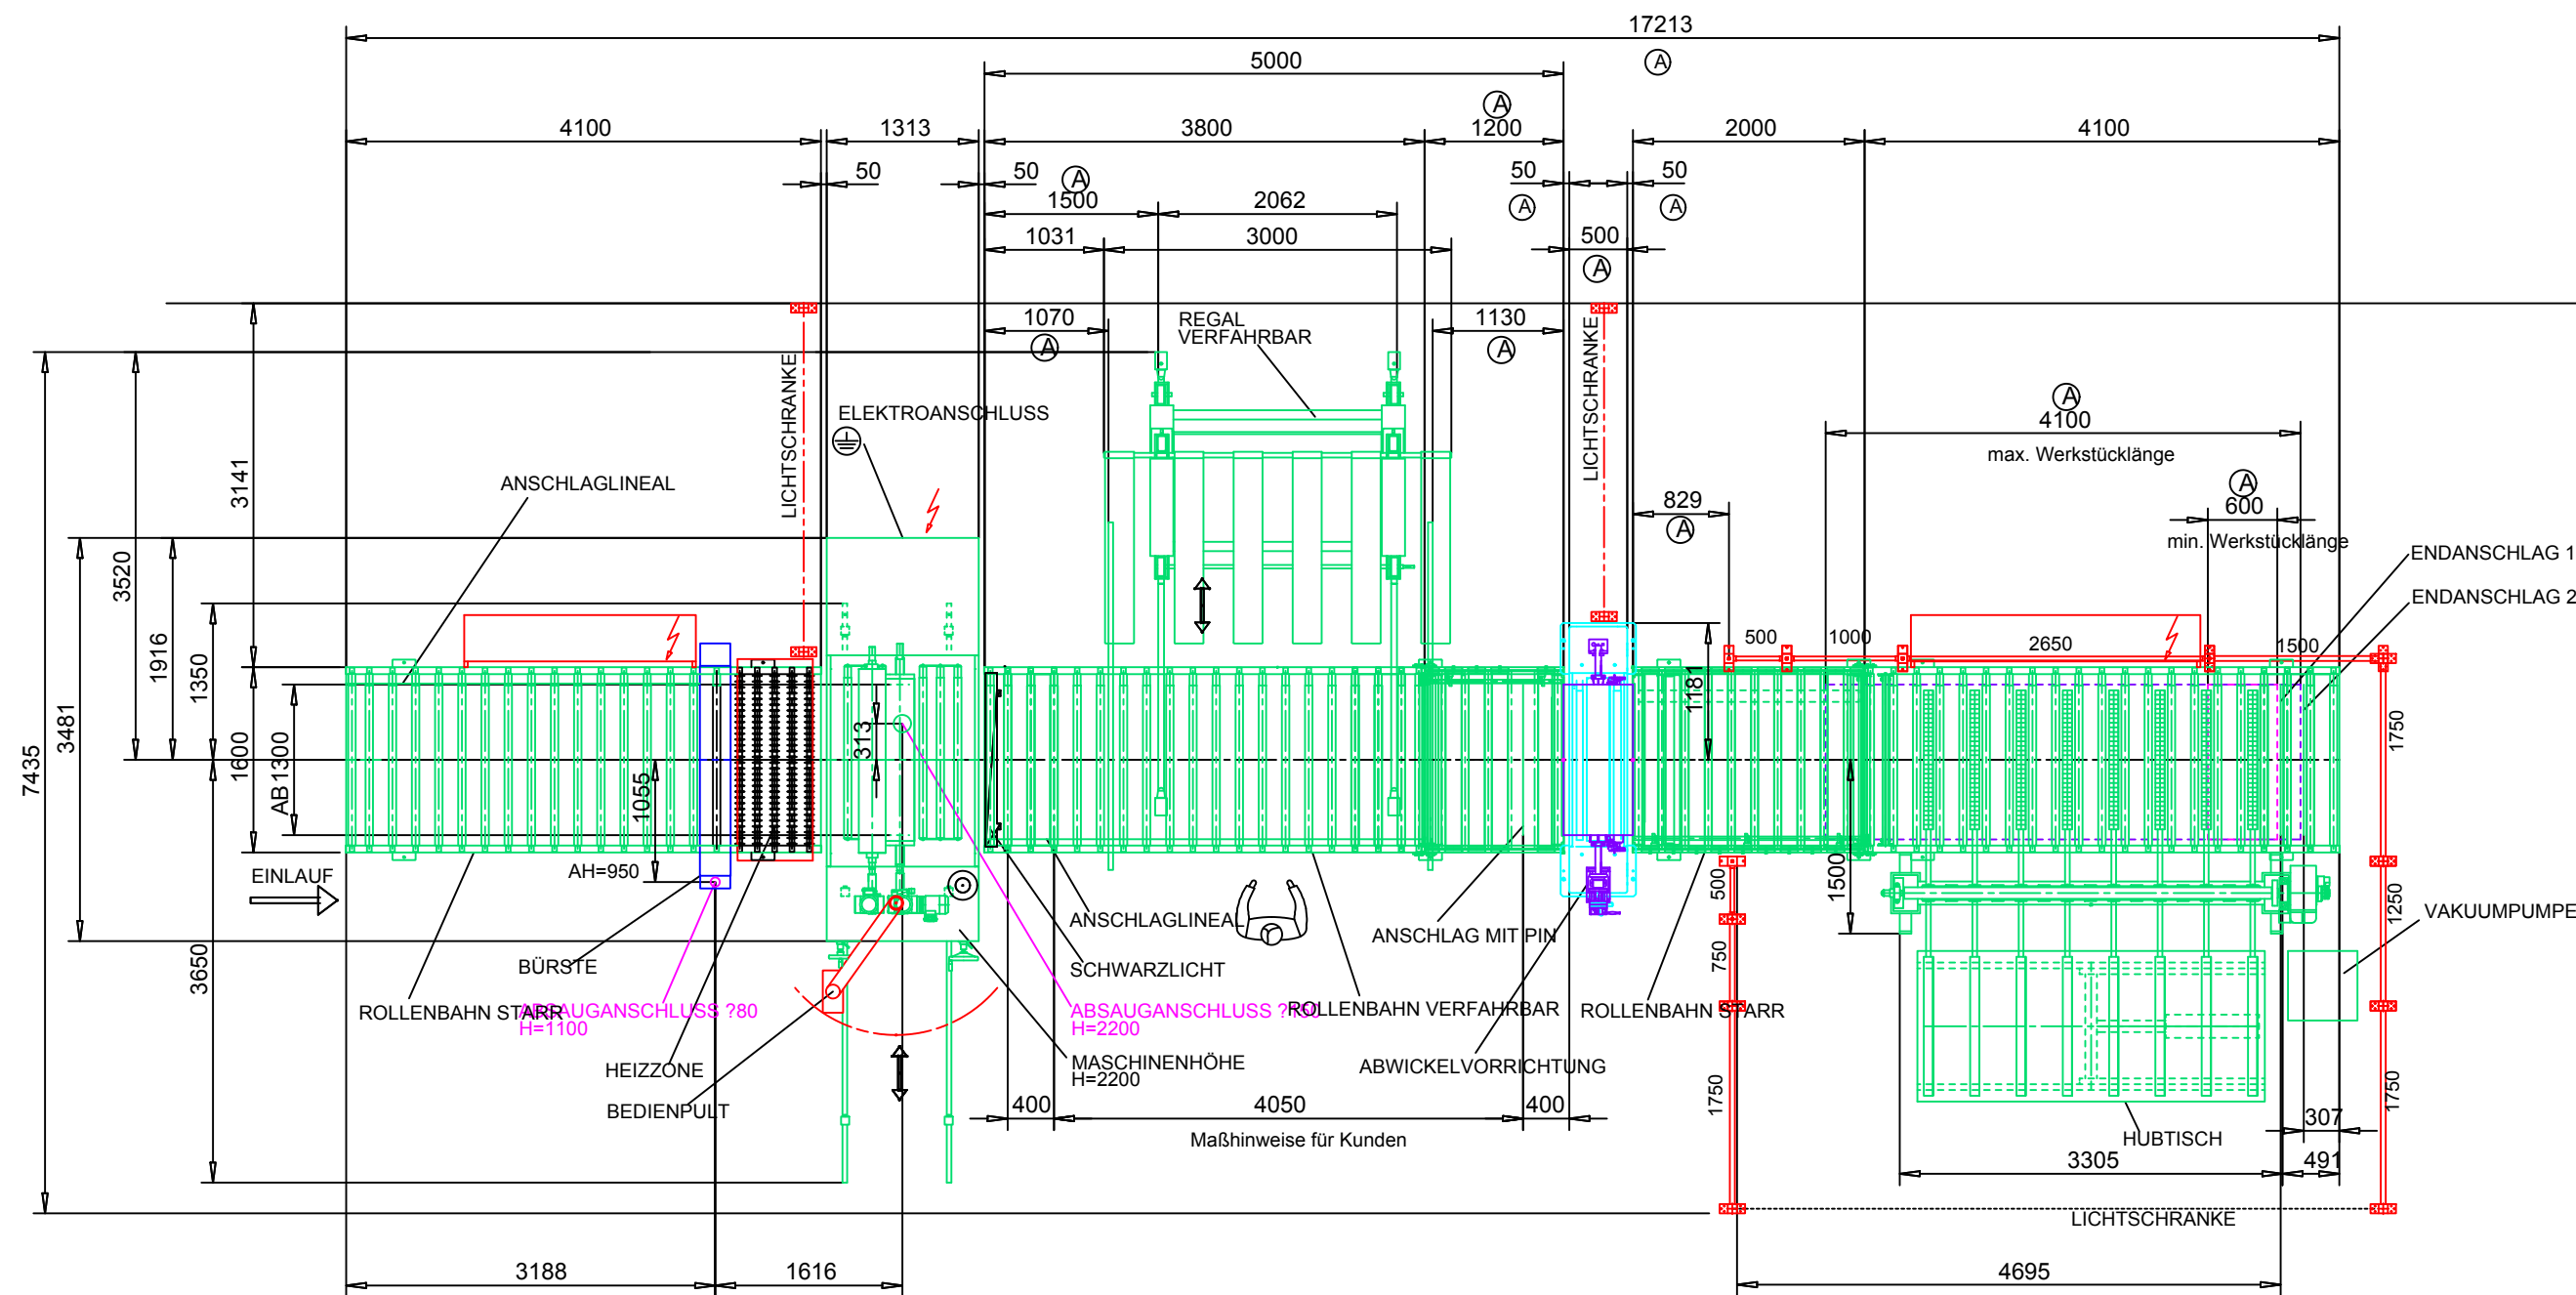

BODENBELASTUNG CA 0.2-0.3 N/MM2 IM BEREICH DER
MASCHINENBETTEN MIN. BETONDICKE = 200 MM
BETONQUALITÄT C25/30 XC1
ZUG-/DRUCKBELASTBAR
BODENEBENHEIT: TOLERANZ = +/- 10MM

TECHNICAL SPECIFICATIONS

TOTAL SUCTION CONSUMPTION CA. M3 / H	1500
AIR CONSUMPTION CA. NL/MIN	900
PRESSURE LOSS CA. PA	500
TOTAL CONNECTED LOAD CA. KW	80
NOMINAL CURRENT CA. A	145
BACKUP FUSE A	160

Disegnatore: Ferwood srl

Titolo: 005095_MA

Descrizione:
Gluing Machine
TORWEGGE PWR 500/30/13/E

FerWood®
BRILLIANT SOLUTIONS FOR WOOD

FerWood srl - Via Langhe 4/A 12044 Pollenzo (CN) Italy
Tel: +39 0172 474073 - fax: +39 0172 471442

email: info@ferwoodgroup.com

Data: Sistema:

Foglio: A3

Tutti i diritti sono riservati da Copyright. È vietata la riproduzione. All rights reserved by Copyright. It is forbidden to reproduce.