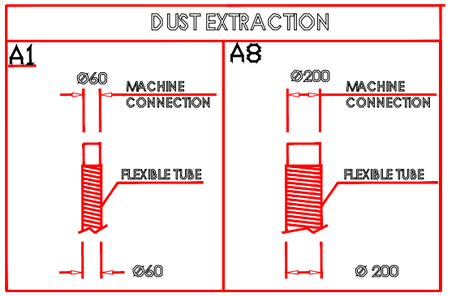

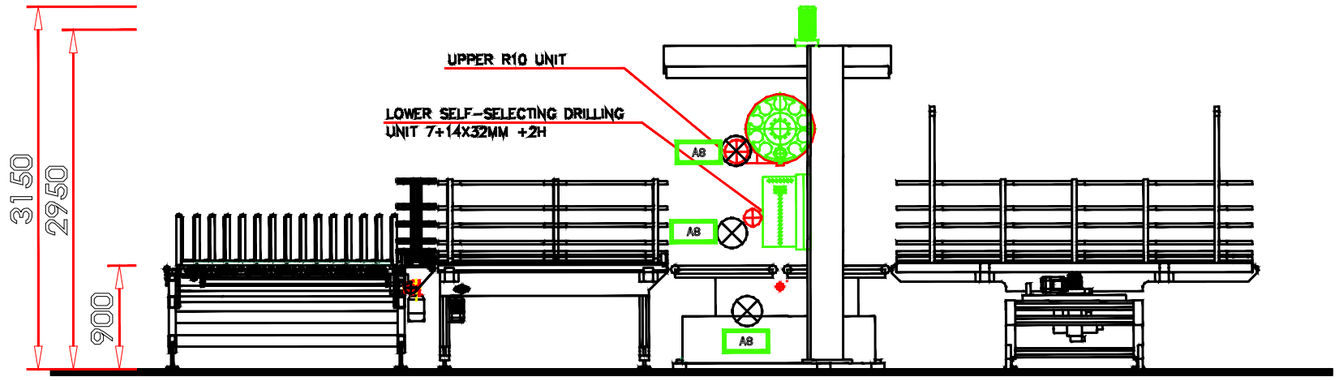

TECHNICAL SPECIFICATIONS

DUST EXTRACTION DATA

POSITION	N°	DIAMETER mm	AIR SPEED m/s	VOLUME m³/h	CONNECTION TYPE	USAGE	SUCTION GATE
A1	1	60	28	300	FLEXIBLE TUBE		NO
A8	2	200	28	6400	FLEXIBLE TUBE		NO
TOTAL	3			6700			

PNEUMATIC DATA

POSITION	PRESSURE	INLET Ø	AIR CONS.
PM.1	6-7 BAR	1"	500 NL/min

PNEUMATIC SYSTEM SPECIFICATIONS

AIR SPECIFICATIONS OF THE SYSTEM	ISO 8573-1
MAX CONTENT OF OIL	CLASS 3 (1 mg/m3)
DEW-POINT VALUE	CLASS 4 (+ 3 °C)
MAX NUMBER OF PARTICLES m3	CLASS 2

ELECTRICAL DATA

VOLTAGE	400 V Ac
FREQUENCY	50 Hz
ELECTRICAL POWER (E1)	36 KW 65A
CABLING	4x25 mm²

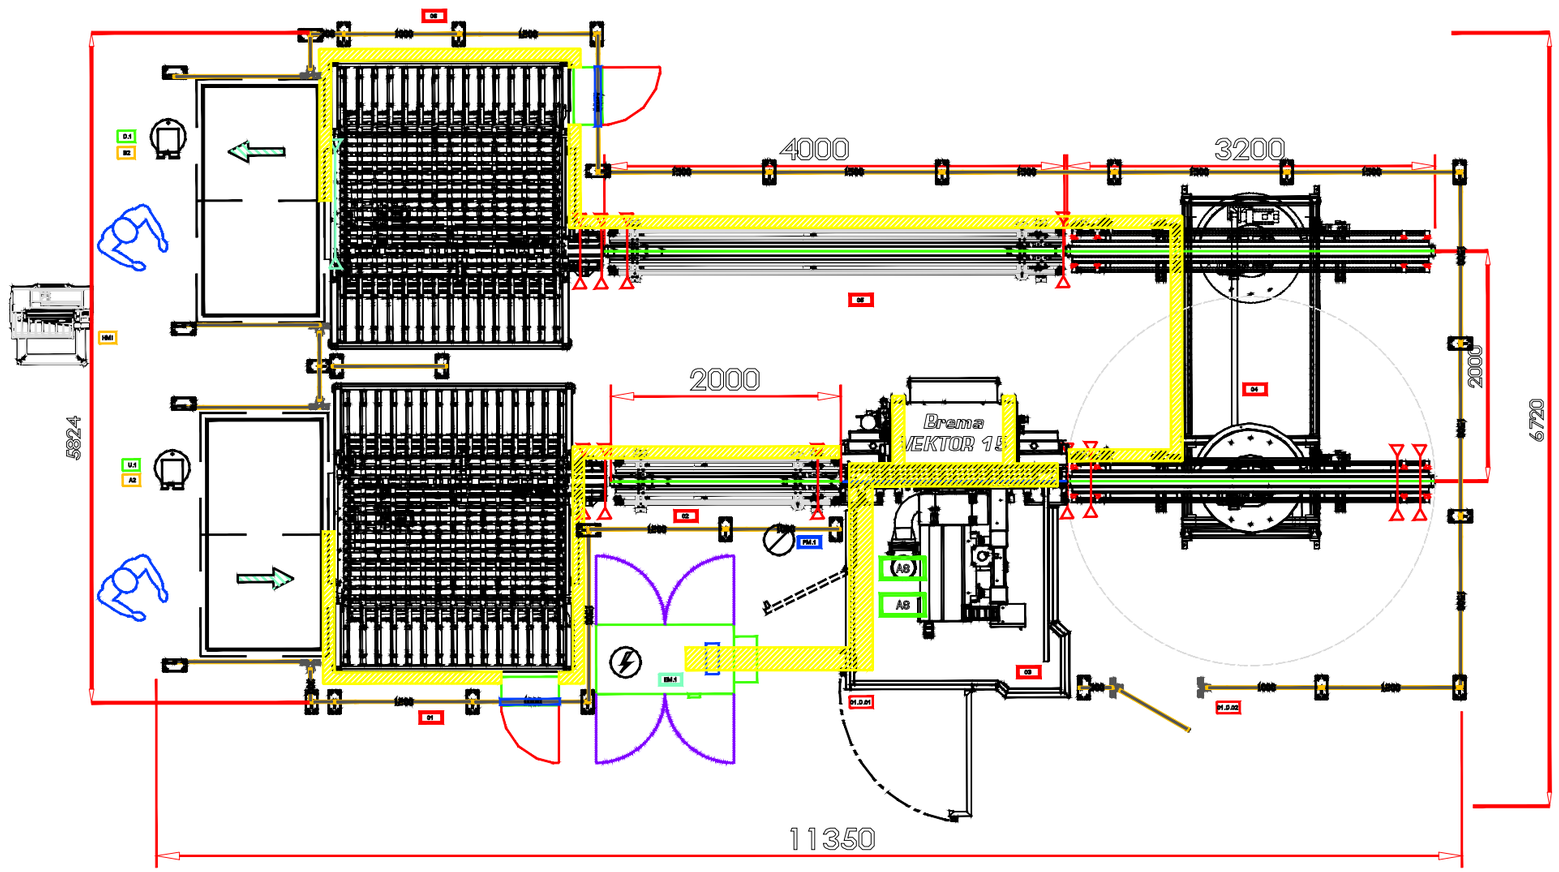

PANEL DIMENSIONS

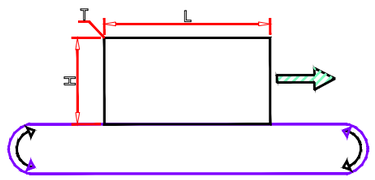

DIMENSIONS	MAX	MIN
L	2800	240
H	1300	65
T	40*	6*

*=manual bulkhead adjustment

Disegnatore: FerWood spa

Titolo: 008742_La

Descrizione: CNC Flexible Drilling center BREMA VEKTOR 15

Data:

Sistema:

Foglio: A3

FerWood®
BRILLIANT SOLUTIONS FOR WOOD

FerWood spa - Via Langhe 4/A 12047 Pollenzo (CN) Italy
Tel: +39 0172 474073 - fax: +39 0172 471442
email: info@ferwoodgroup.com

Tutti i diritti sono riservati da Copyright© vietata la riproduzione
All rights reserved by Copyright© is forbidden to reproduce