


EMPFEHLUNGSLISTE:						
QUERSCHNITTS- FLAECHE ..MM/2						
SICHERUNG	16 A	20 A	25 A	35 A	50 A	63 A
LEITUNGSLAENGE						
- 10 m	2.5 mm ²	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
10 - 20 m	2.5 mm ²	4.0 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
20 - 30 m	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²	16.0 mm ²

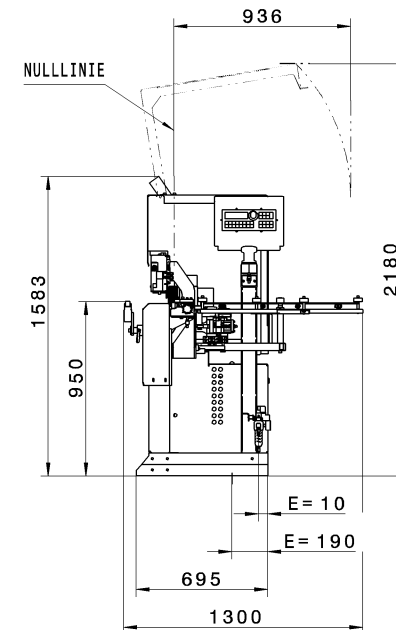

E= **ELEKTROANSCHLUSS**
BETRIEBSSPANNUNG
400V - 3PH - 50HZ
GESAMTANSCHLUSSWERT
5.5KW

NENNSTROM
8A

GEWICHT
CA. 1260KG

D= **DRUCKLUFTANSCHLUSS**
6BAR / $\phi 1/2"$

ABSAUGELEISTUNG
 $\phi 60\text{MM}$ 285M³/H
 $\phi 100\text{MM}$ 790M³/H

LUFTGESCHWINDIGKEIT
28M/SEC

DRUCKVERLUST * *
CA. 2000PA

LUFTVERBRAUCH

FerWood BRILLIANT SOLUTIONS FOR WOOD	PROJECT:	
	CODE:	006116_MA
	TYPE:	SINGLE SIDED EDGE BANDER
	BRAND:	BRANDT KDN 220
	DESIGNER:	
	DATE:	
	FILE:	

