
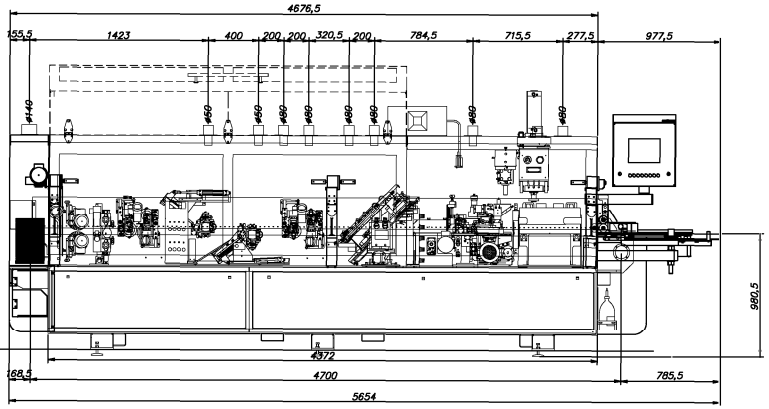



La superfice sulla quale è fissata la macchina deve avere tolleranza di planarità pari a 10mm.

The supporting surface the machine is fixed on must have 10mm planarity tolerance

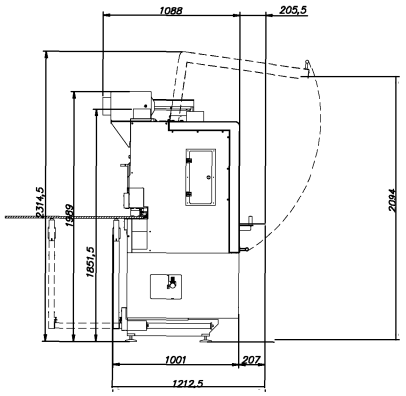

Si specifica che l'eventuale utilizzo dei consensi di linea con i quali la macchina è stata predisposta al fine di agevolare un'eventuale installazione in linea comporta la decadenza dell'efficacia della dichiarazione CE emessa ai sensi dell'All. IIA della direttiva 2006/42/CE, di cui è corredata la macchina, e richiede la ricertificazione a cura del Cliente dell'insieme risultante di cui egli diventerà il "Fabbricante", il tutto ai sensi della Direttiva 2006/42/CE.

Please be advised that any use of line consents with which the machine is pre-set, for facilitating on-line installation, will nullify the effect of the EC Declaration issued according to Attachment IIA of Directive 2006/42/EC, which was provided with the machine; moreover, the use of said line consents requires that the Client recertifies the resulting configuration, of which the Client becomes "Manufacturer" for all rights and purposes of Directive 2006/42/EC.

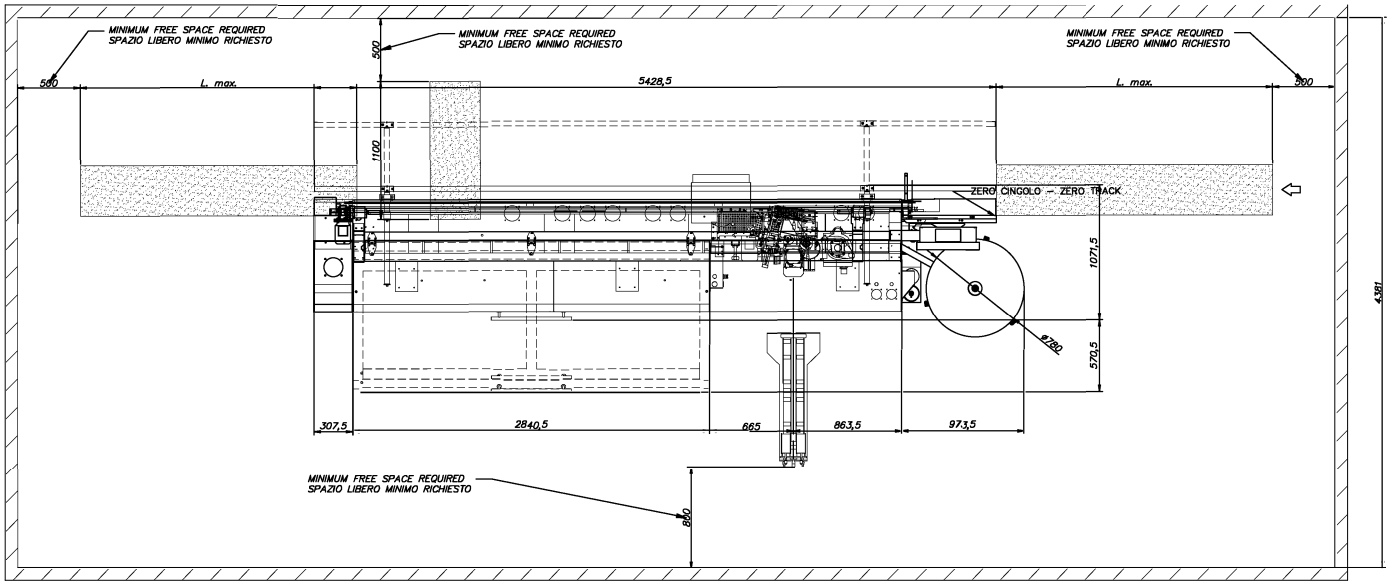

Le prestazioni della macchina sono garantite lavorando pannelli con dimensioni non superiori a quelle indicate
Le misure degli spazi liberi attorno alla macchina rappresentano il valore minimo richiesto dalle normative vigenti

The machine's performance are guaranteed working panels with dimensions not exceeding those set
The measures of free space around the machine are the minimum required by current regulations

La depressione statica nelle bocchette di aspirazione deve essere al massimo 1500Pa (con velocità di aspirazione pari a 20m/s)

The pressure drop between the inlet of all capture device and the connection to the chip and dust extraction system should be maximum 1500Pa (at 20m/s air flow rate)

AIRFUSION AF15

DATI TECNICI – TECHNICAL DATA

ARIA COMPRESSA – COMPRESSED AIR	PRESSIONE DI ALIMENTAZIONE MIN. – INPUT PRESSURE MIN. (MPa)	0.8
	PRESSIONE DI ESERCIZIO – OPERATING PRESSURE (MPa)	0.6
	CONSUMO – CONSUMPTION (NL/min)	850
MASSA – WEIGHT	MASSA APPROSSIMATIVA – WEIGHT APPROXIMATE (KG)	50
ALIMENTAZIONE ELETTRICA – POWER SUPPLY	TENSIONE NOMINALE – NOMINAL VOLTAGE (V)	400
	CORRENTE NOMINALE APPROSS. – NOMINAL CURRENT APPROXIMATE (A)	11
	POTENZA TOTALE INSTALLATA APPROSS. – APPROXIMATE TOTAL CONNECTED LOAD (KVA)	7,5
	POTENZA NOMINALE INSTALLATA APPROSS. – APPROXIMATE NOMINAL CONNECTED LOAD (KW)	6

DATI TECNICI – TECHNICAL DATA – TECHNISCHE DATEN

ARIA ASPIRATA – EXTRACTED AIR – ANGESAUGTE LUFT	VELOCITA' – SPEED – GESCHWINDIGKEIT (m/s)		28
	CONSUMO – CONSUMPTION – VERBRAUCH (m3/h)	INCOLLAGGIO – GLUING UNIT – AUFLEIMER	600
		GRUPPO OPERATORI – MACHINING UNITS – ARBEITSAGGREGATE	5500
ARIA COMPRESSA – COMPRESSED AIR – DRUCKLUFT	PRESSIONE DI ALIMENTAZIONE MIN. – INPUT PRESSURE MIN. – VERSORGUNGSDRUCK MIN. (MPa)		0.8
	PRESSIONE DI ESERCIZIO – OPERATING PRESSURE – BETRIEBSDRUCK (MPa)		0.6
	CONSUMO – CONSUMPTION – VERBRAUCH (NL/min)		850
MASSA – WEIGHT – GEWICHT	MASSA APPROSSIMATIVA – WEIGHT APPROXIMATE – UNGEFÄHRES GEWICHT (KG)		1700
ALIMENTAZIONE ELETTRICA – POWER SUPPLY – STROMVERSORGUNG	CORRENTE NOMINALE APPROSS. – NOMINAL CURRENT APPROXIMATE (A) (CON TENSIONE NOMINALE A 400V – WITH NOMINAL VOLTAGE AT 400V)		32
	POTENZA TOTALE INSTALLATA APPROSS. – TOTAL CONNECTED LOAD APPROXIMATE – UNGEFÄHRE INSGESAMT INSTALLIERTE LEISTUNG (KVA)		22,1

Rev	Data/Date	Firma/Signature	Descrizione ultima modifica/Last change description	N° Modifica/Change ID

CLIENTE – CUSTOMER

TIPO MACCHINA – TYPE MACHINE: STEFANI KD HP-TERL I=4700

COMMESSA – ORDER: R00780 | OPZIONALE – OPT. | CONFERMA

FIRMA – SIGNATURE: 008350_La

ARCHIVIO: PLM

N° DISEGNO – DRAWING: 90L0407552C

SCALA – SCALE: 1:20

DATA: 08/05/17

MATRICOLA

FerWood® BRILLIANT SOLUTIONS FOR WOOD