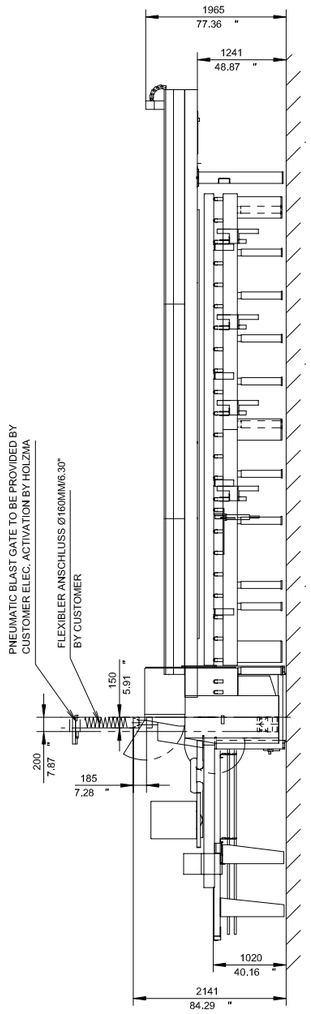

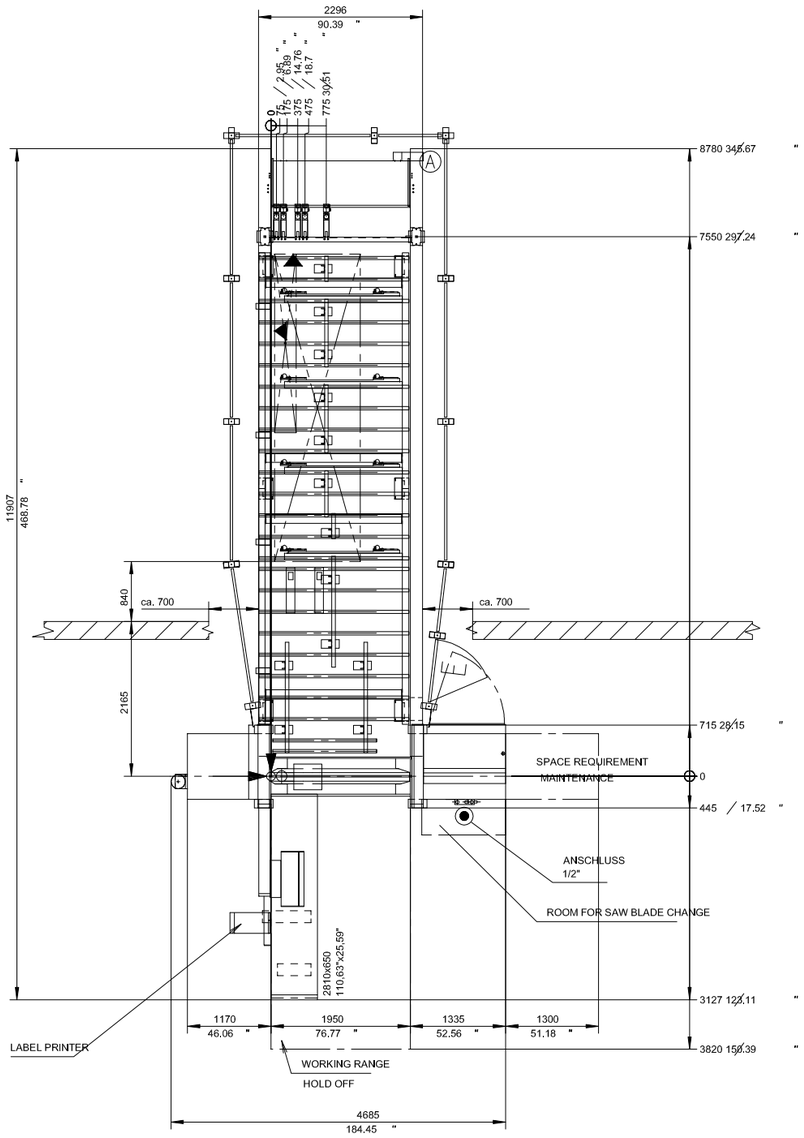

TYP PROFILINE HQP11/16/43/L/X

MAXIMUM PANEL SIZE	MM (INCH)	4300 X 1200 (169,29" X 47,24")	
MINIMUM PANEL SIZE	MM (INCH)	2500 x 300 (98,43" X 11,81")	
SAW BLADE PROJECTION	MM (INCH)	125	(4,92")
CUTTING LENGTH	MM (INCH)	1600	(62,99")

TECHNICAL DATA			HQP11/16/43/L
TOTAL DUST EXTRACTION CAPACITY	M3/H	(CFM)	5800 (3431,3)
AIR VELOCITY	M/SEK	(FEET/SEK)	26 (85,28)
COMPRESSED AIR CONSUMPTION	NL/MIN	(CFM)	210 (7,41)
DRUCKVERLUST	PA N/M2	(INCH WS)	1200 (4,82)
MAIN SAW MOTOR	KW		13,5
TOTAL CONNECTED LOAD	KW		20,0
NOMINAL CURRENT	A		31
RECOMMENDED PREFUSE PROTECTION	A		35

PLEASE RETURN THE APPROVED DRAWING IMMEDIATELY,
PLEASE GIVE EXACT SIZES OF MODIFICATION

DATE: ..... SIGNED: .....

DATE: ..... SIGNATURE OF CUSTOMER .....

PLEASE MARK APPLICABLE WITH A CROSS		X
CONNECTION CABLE SWITCH CABINET MACHINE	ON THE FLOOR BY CUSTOMER	
	IN CABLE CHANNEL BY CUSTOMER	
	CIA CEILING ,... MM HIGHT BY CUSTOMER	

LOAD APPROX . 1,5N/MM 2
CONCRETE QUALITY C25/30 XC1 CAPABLE OF BEARING PRESSURE AND TENSION
THICKNESS OF CONCRETE MIN. 200 MM
EVENESS OF FLOOR: TOLERANCE =+/ 10MM (+/ 0.39")

GROUTING BY CUSTOMER OF THE MOUNTING PLATES WITH CASTING COMPOUND RESISTANT TO SHRINKING AFTER INSTALLATION

REPRESENTATION AND DIMENSIONING OF INSTALLATIONS PROVIDED BY THE CUSTOMER AND MACHINES OF FOREIGN BRAND WITHOUT GUARANTEE

ELECTRICAL GROUNDING POINT MACHINE
FUNCTION NOT GUARANTEED WITHOUT PROPER
GROUNDING IN ACCORDANCE WITH LOCAL ELECTRICAL CODE.
EARTHING RESISTANCE . <3 OHM
PROTECTIVE CIRCUIT IS ONLY PERMISSIBLE IN COMBINATION
WITH AN ALL CURRENT SENSITIVE/SELECTIVE FI PROTECTIVE SWITCH

REFERENCE LINE

CONNECTION FOR COMPRESSED AIR WITH HOSE 1/2" (INSIDE DIAMETER 12.7MM)
SUPPLY G2"
AIR PRESSURE IN SUPPLY LINE MIN.
STANDARD COMPRESSED AIR QUALITY ACCORDING TO ISO 8573 1
QUALITY CLASS
SOLID IMPURITIES CLASS 3
WATER CONTENT CLASS 4
TOTAL OIL CONTENT CLASS 3

MACHINE ZERO POINT

REFERENCE POINT

Disegnatore:
FerWood s.p.a.

Titolo: 008348_La

Descrizione:
HOLZMA HQP11/16/43/L/X
FRONT LOADING PANEL SAW

Data: 30/04/2026 Sistema:

Foglio: A3

FerWood®
BRILLIANT SOLUTIONS FOR WOOD
FerWood spa - Via Langhe 4/a 12042 Pollenzo (CN) Italy
Tel. +39 0172 474073 - Fax. +39 0172 471442
email: info@ferwoodgroup.com

Tutti i diritti sono riservati da Copyright© vietata la riproduzione
All rights reserved by Copyright© is forbidden to reproduce