


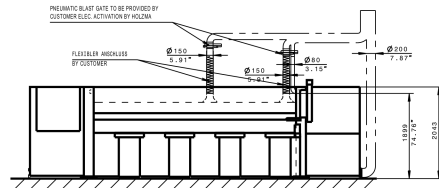


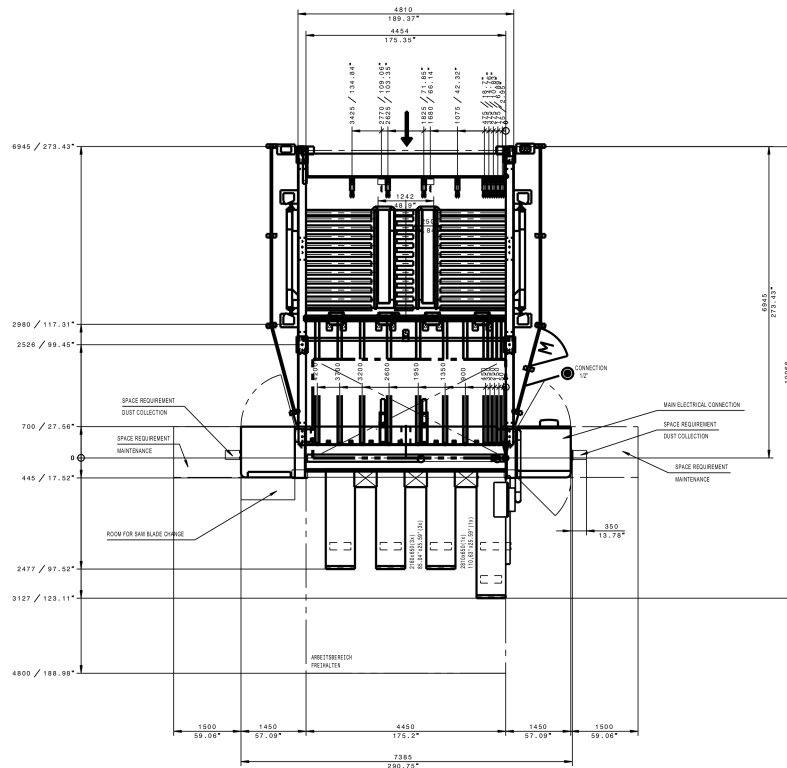

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

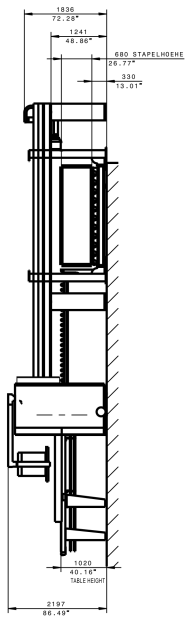

MOUNTING AID

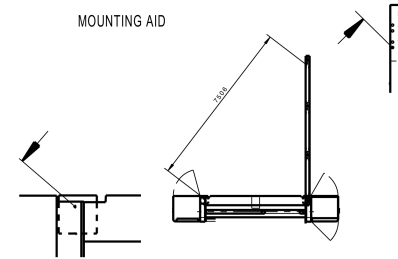

TYP PROFILINE HPL530/43/22/R

MAXIMUM PANEL SIZE	MM (INCH)	4300 X 2200 (169.29' X 86.61')
MINIMUM PANEL SIZE	MM (INCH)	1120 X 400 (44.09' X 15.75')
SAW BLADE PROJECTION	MM (INCH)	130 (5.12')
CUTTING LENGTH	MM (INCH)	4300 (169.29')
TECHNICAL DATA		R HPL530/43/22
TOTAL DUST EXTRACTION CAPACITY	M3/H (CFM)	5300 (3413.3)
AIR VELOCITY	M/SEK (FEET/SEK)	26 (85.28)
COMPRESSED AIR CONSUMPTION	NL/WH (CFM)	150 (5.30)
DRIVE/VELOCITY	PA N/100 (INCH/MS)	1200 (6.82)
TOTAL CONNECTED LOAD	KW	BET 18.000/21.000 30.033.0
NOMINAL CURRENT	A	
RECOMMENDED PREFUSE PROTECTION	A	

PLEASE RETURN THE APPROVED DRAWING IMMEDIATELY.
PLEASE GIVE EXACT SIZES OF MODIFICATION.

DATE: SIGNED: SIGNATURE OF CUSTOMER

PLEASE MARK APPLICABLE WITH A CROSS		X
CONNECTION CABLE ON THE FLOOR BY CUSTOMER		
SWITCH CABINET IN CABLE CHANNEL BY CUSTOMER		
MACHINE VIA CEILING ... MM HEIGHT BY CUSTOMER		

WITHOUT OUR PERMISSION THIS DRAWING MUST NOT BE REPRODUCED NOR DUPLICATED NOR MADE ACCESSIBLE TO THIRD PARTIES OR COMPETITORS

MASCH.NR.: 0-240-02-3138
0-240-02-3139

BELASTUNG CA: 1,5N/MM²
CONCRETE QUALITY C25/30 XC1 CAPABLE OF BEARING PRESSURE AND TENSION
THICKNESS OF CONCRETE MIN. 200 MM
EVENNESS OF FLOOR: TOLERANCE +/- 10MM (+/- 0.39")

GROUTING BY CUSTOMER OF THE MOUNTING PLATES WITH CASTING COMPOUND RESISTANT TO SHRINKING AFTER INSTALLATION.

REPRESENTATION AND DIMENSIONING OF INSTALLATIONS PROVIDED BY THE CUSTOMER AND MACHINES OF FOREIGN BRAND WITHOUT GUARANTEE

ELECTRICAL GROUNDING POINT MACHINE
FUNCTION NOT GUARANTEED WITHOUT PROPER GROUNDING IN ACCORDANCE WITH LOCAL ELECTRICAL CODE.
EARTHING RESISTANCE < 3
PROTECTIVE CIRCUIT IS ONLY PERMISSIBLE IN COMBINATION WITH AN ALL CURRENT SENSITIVE/SELECTIVE FI PROTECTIVE SWITCH

REFERENCE LINE
PRESSLUFTANSCHLUSS UEBER SCHLAUCH 1/2" (LINIENDURCHMESSER 12,7MM)
ZULEITUNG G2"

AIR PRESSURE IN SUPPLY LINE MIN. 7 BAR (102 PSI)
STANDARD COMPRESSED AIR QUALITY ACCORDING TO ISO 8573 1
QUALITY CLASS

SOLID IMPURITIES CLASS 3
WATER CONTENT CLASS 4
TOTAL OIL CONTENT CLASS 2

MACHINE ZERO POINT

REFERENCE POINT

MATERIAL Schabziele
SCHWAB
HOLZMA PLATTENAUFTEIL-TECHNIK GMBH

PLAN DRAWING
5 211 66 8520

GATIA A1 T80 GEWICHT (kg) 11.4 11.4



PROFI HPL530/43/22
0-240-02-3139



PROJECT:	
CODE:	004478
TYPE:	BEAM SAW MACHINE
BRAND:	HOLZMA HPL 530/43/22 PROFIL
DESIGNER:	
DATE:	
FILE:	