
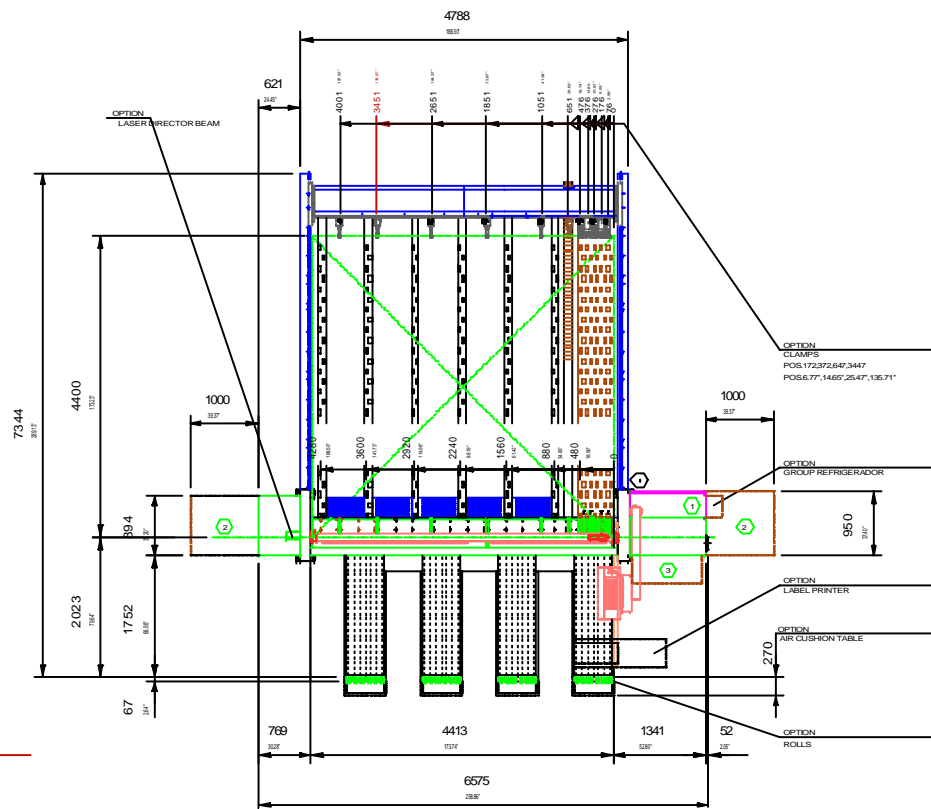
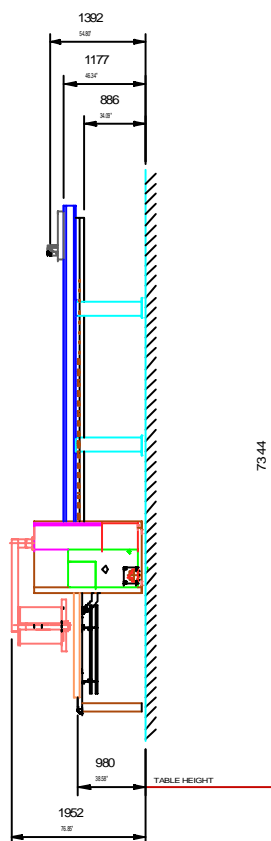


ISO TOL.	TOLERANZA

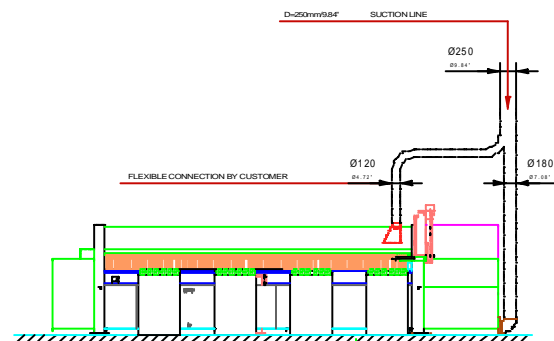

TYPE		OPTIMAT HPP250 44/44	
FOR APPROVAL:			
DATE:		SIGNED:	
VERIFIED:			
DATE:		SIGNED:	
PLEASE RETURN THE APPROVED DRAWING IMMEDIATELY, OTHERWISE DELIVERY MAY BE DELAYED			
SUBJECT TO CONSTRUCTIVE MODIFICATIONS WITHOUT OUR PERMISSION THIS DRAWING MUST NOT BE REPRODUCED OR USED BY ANY PARTIES OR COMPETITORS			
15x11 LAW OF 19.06.1901			
1 MAIN ELECTRICAL CONNECTION			
2 SPACE REQUIREMENT MAINTENANCE      RIGHT      O      LEFT			
3 ROOM FOR SAW BLADE CHANGE			
4 PNEUMATIC CONNECTION 1/2" SUPPLY 2"			
X DUST-COLLECTOR MUFF			
5 SAFETY LIGHT BARRIER			
CONCRETE QUALITY B25 CAPABLE OF BEARING PRESSURE AND TENSION THICKNESS OF CONCRETE MIN. 200 MM (7.9") EVENNESS OF FLOOR TOLERANCE $\pm$ 10MM ( $\pm$ 0.4")			
GROUTING BY CUSTOMER OF THE MOUNTING PLATES WITH CASTING COMPOUND RESISTANT TO SHRINKING AFTER INSTALLATION			
REPRESENTATION AND DIMENSIONINGS OF INSTALLATIONS PROVIDED BY THE CUSTOMER AND MACHINES OF FOREIGN BRAND WITHOUT GUARANTEE			
MAXIMUM PANEL SIZE		4400 x 4400mm	173.23 x 173.23"
MINIMUM PANEL SIZE		... x ... mm	... x ..."
SAW BLADE PROJECTION		72mm	2.83"
CUTTING LENGTH RPP SAW		4400 mm	173.23"
CUTTING LENGTH TRIM SAW		..."	..."
MAIN SAW MOTOR		7.5 kW	TOTAL CONNECTED LOAD 14.0kW
MAIN SAW MOTOR		9.2 kW	TOTAL CONNECTED LOAD 16.0kW
AIR PRESSURE REQUIRED *			6 bar 97 psi
TOTAL AIR REQUIREMENTS FOR 1 bar/14.5psi			150 Nl/min 525 CFM
SUCTION CAPACITY			4000 m³/h 200 CFM
AIR VELOCITY			26 m/s 85.28 feet

Designazione: FerWood spa

Titolo: 007618\_Ma

Descrizione:

Data: 28/11/24

Sistema:

Foglio: A3

Tutti i diritti sono riservati da Copyright. È vietata la riproduzione. All rights reserved by Copyright. It is forbidden to reproduce.

**FerWood®**

BRILLIANT SOLUTIONS FOR WOOD

FerWood spa - Via Lomello 4/A 12010 C. PAVIA (PV) Italy

Tel: +39 0172 474073 - Fax: +39 0172 474142

email: [info@ferwoodgroup.com](mailto:info@ferwoodgroup.com)