


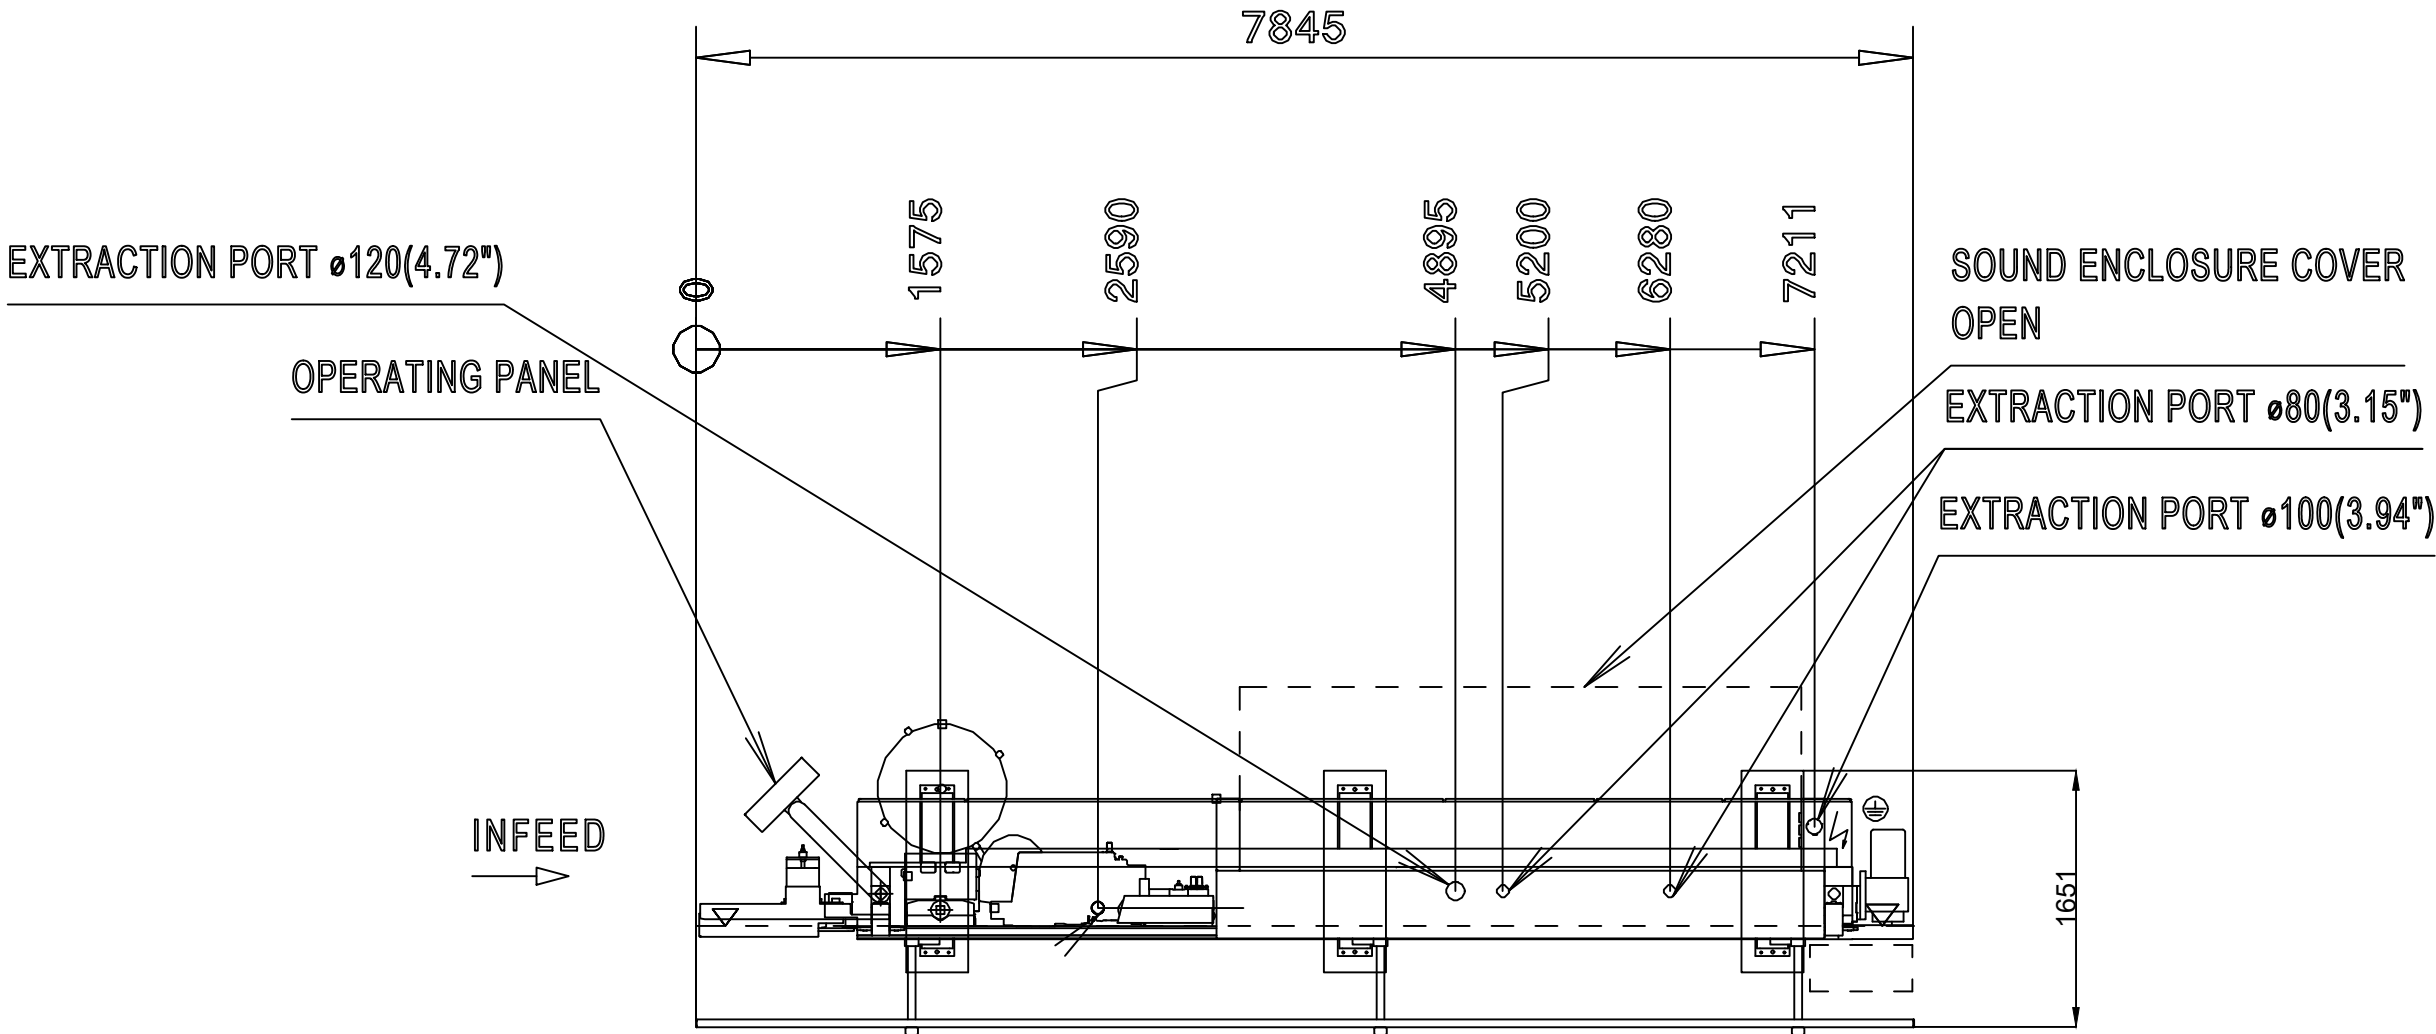

WORKING HEIGHT 950MM(37,4")									
TECHNICAL DATA									
TOTAL WEIGHT	CA.	KG		4500					
TOTAL DUST EXTRACTION CAPACITY	CA.	M3/H	(CFM)	3690 (2172)					
GESAMTABSAUGELEISTUNG MIT PU	CA.	M3/H	(CFM)	4200 (2470)					
COMPRESSED AIR CONSUMPTION	CA.	NL/MIN	(CFM)	855 (30,2)					
DRUCKVERLUST	CA.	PA	(INCH/WS)	2500 (9,84)					
VOLTAGE	V		200	220	380	400	415	480	600
TOTAL CONNECTED LOAD	CA.	KW	28	28	28	28	28	28	28
NOMINAL CURRENT	CA.	A	104	94	55	52	50	43	35
RECOMMENDED BACK-UP FUSE	A		125	125	63	63	63	50	50

CONNECTION OF MAIN AND ELECTRICAL EQUIPMENT BUILDING OR FOUNDATION GROUND CONNECTION VIA RIBBON FABRIC GROUNDING STRIP. THIS EMC FUNCTIONAL GROUNDING IS REQUIRED FOR EMC STANDARD COMPLIANCE EN 61381-1 AND EN 61381-2 PROTECTIVE CIRCUIT IS ONLY PERMISSIBLE IN COMBINATION WITH AN ALL-CURRENT-SENSITIVE/SELECTIVE RCD-PROTECTIVE SWITCH

OUTER EDGE OF CHAIN TRACK RESP. FIXED EDGE WORKPIECE OVERHANG 0

CONNECTION FOR COMPRESSED AIR WITH HOSE 3/4" (INSIDE DIAMETER 10MM)
SUPPLY 01" AIR PRESSURE IN SUPPLY LINE MIN. 6 BAR (87 PSI)
STANDARD COMPRESSED AIR QUALITY ACCORDING TO ISO 8573-1
QUALITY CLASS
SOLID IMPURITIES CLASS 3
WATER CONTENT CLASS 4
TOTAL OIL CONTENT CLASS 3

Disegnatore: Ferwood srl		 BRILLIANT SOLUTIONS FOR WOOD FerWood srl - Via Langhe 4/A 12042 Pollenzo (CN) Italy Tel: +39 0172 474073 - fax: +39 0172 471642 email: info@ferwoodgroup.com
Titolo: 005437_MA		
Descrizione: Plaqueuse de chant Unilateral HOMAG KAL 211 EDITION 2264		
Versione 1		
Data:	Sistema:  Foglio: A3	
Data:		