

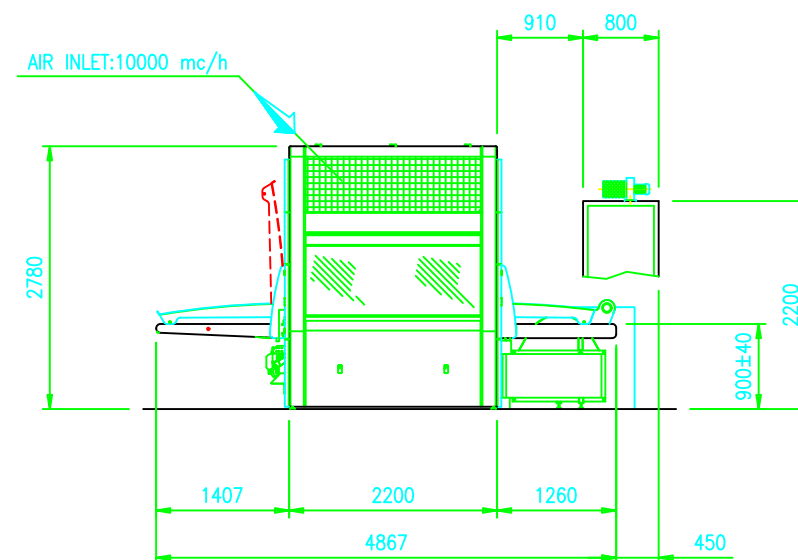
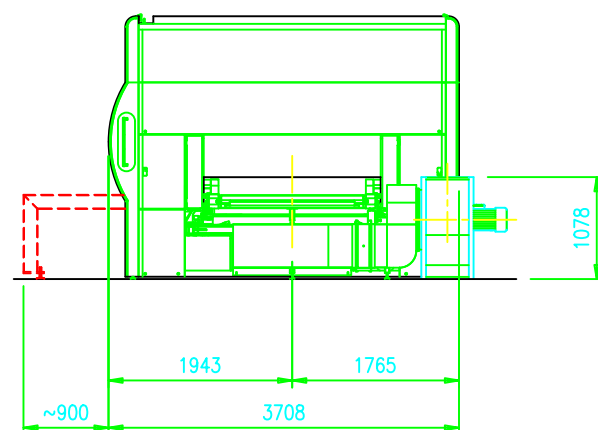


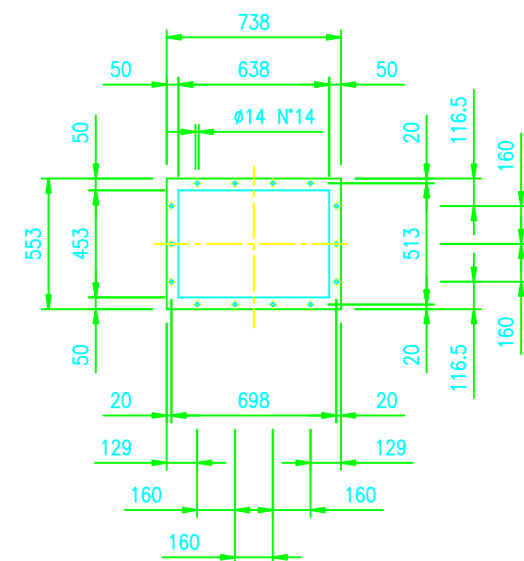

- COMPRESSED AIR CONNECTION POINT $\phi=1"$
- SUPPLY PRESSURE TO MACHINES 6 BAR $\pm 10\%$
- QUALITY CLASS REQUIRED: N° 3.4.3 ISO 8573.1 REGULATION
- AIR INLET FROM THE ROOM
- AIR EXHAUST OPENING TO THE OUTSIDE

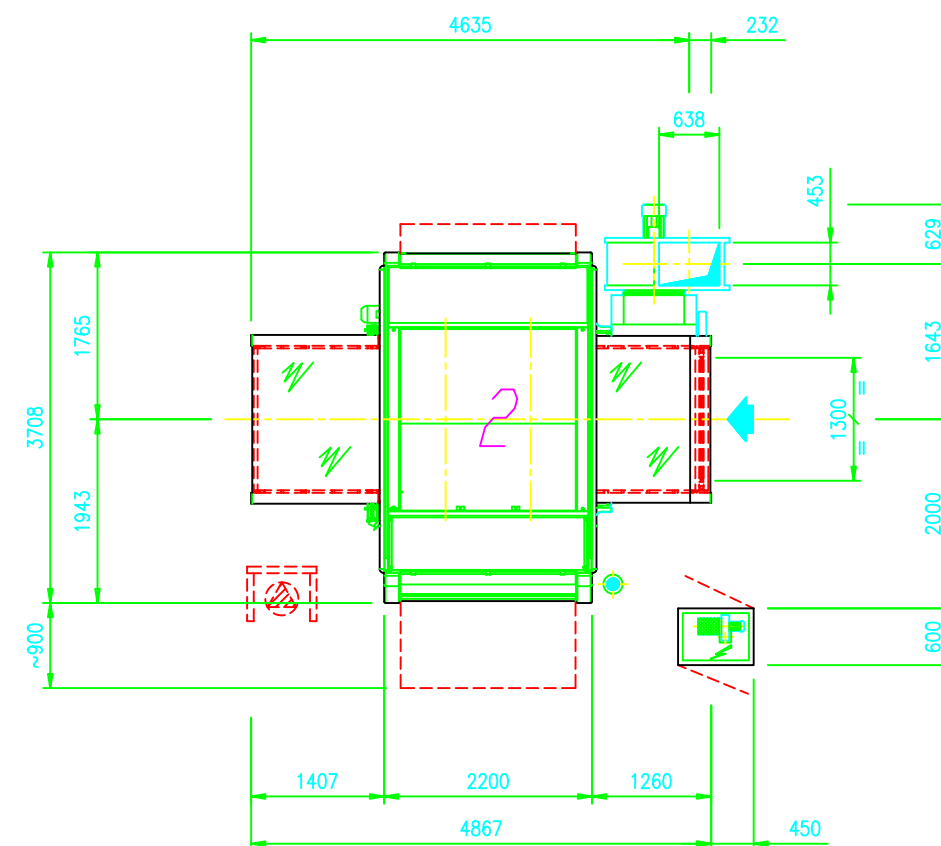

SCALE 1:20

TRANSLATION SPEED OF GUNS	m/1'	MIN. 0 MAX. 120
SPEED OF THE CONVEYOR	m/1'	MIN. 1,60 MAX. 10,60
EXHAUST FAN FLOW RATE	Mc/h	12000
AIR INLET FROM THE ROOM	Mc/h	12000
COMPRESSED AIR CONSUMPTION (SPRAYING GUNS AND PUMPS EXCLUDED)	NI/min	~50
TOTAL ELECTRIC POWER OF CONTROL BOARDS: 17,3 Kw	380V-50Hz-3Ph-N	
TOTAL ELECTRIC CURRENT OF CONTROL BOARDS: 41 A		

Disegnatore: FerWood spa		FerWood® BRILLIANT SOLUTIONS FOR WOOD FerWood spa - Via Langhe 4/A 1204~ Pollenzo (CN) Italy Tel: +39 0172 474073 - fax: +39 0172 471442 email: info@ferwoodgroup.com
Titolo: 007925		
Descrizione:		
Data:	Sistema:	Foglio: A3
Tutti i diritti sono riservati da Copyright vietata la riproduzione All rights reserved by Copyright is forbidden to reproduce		