


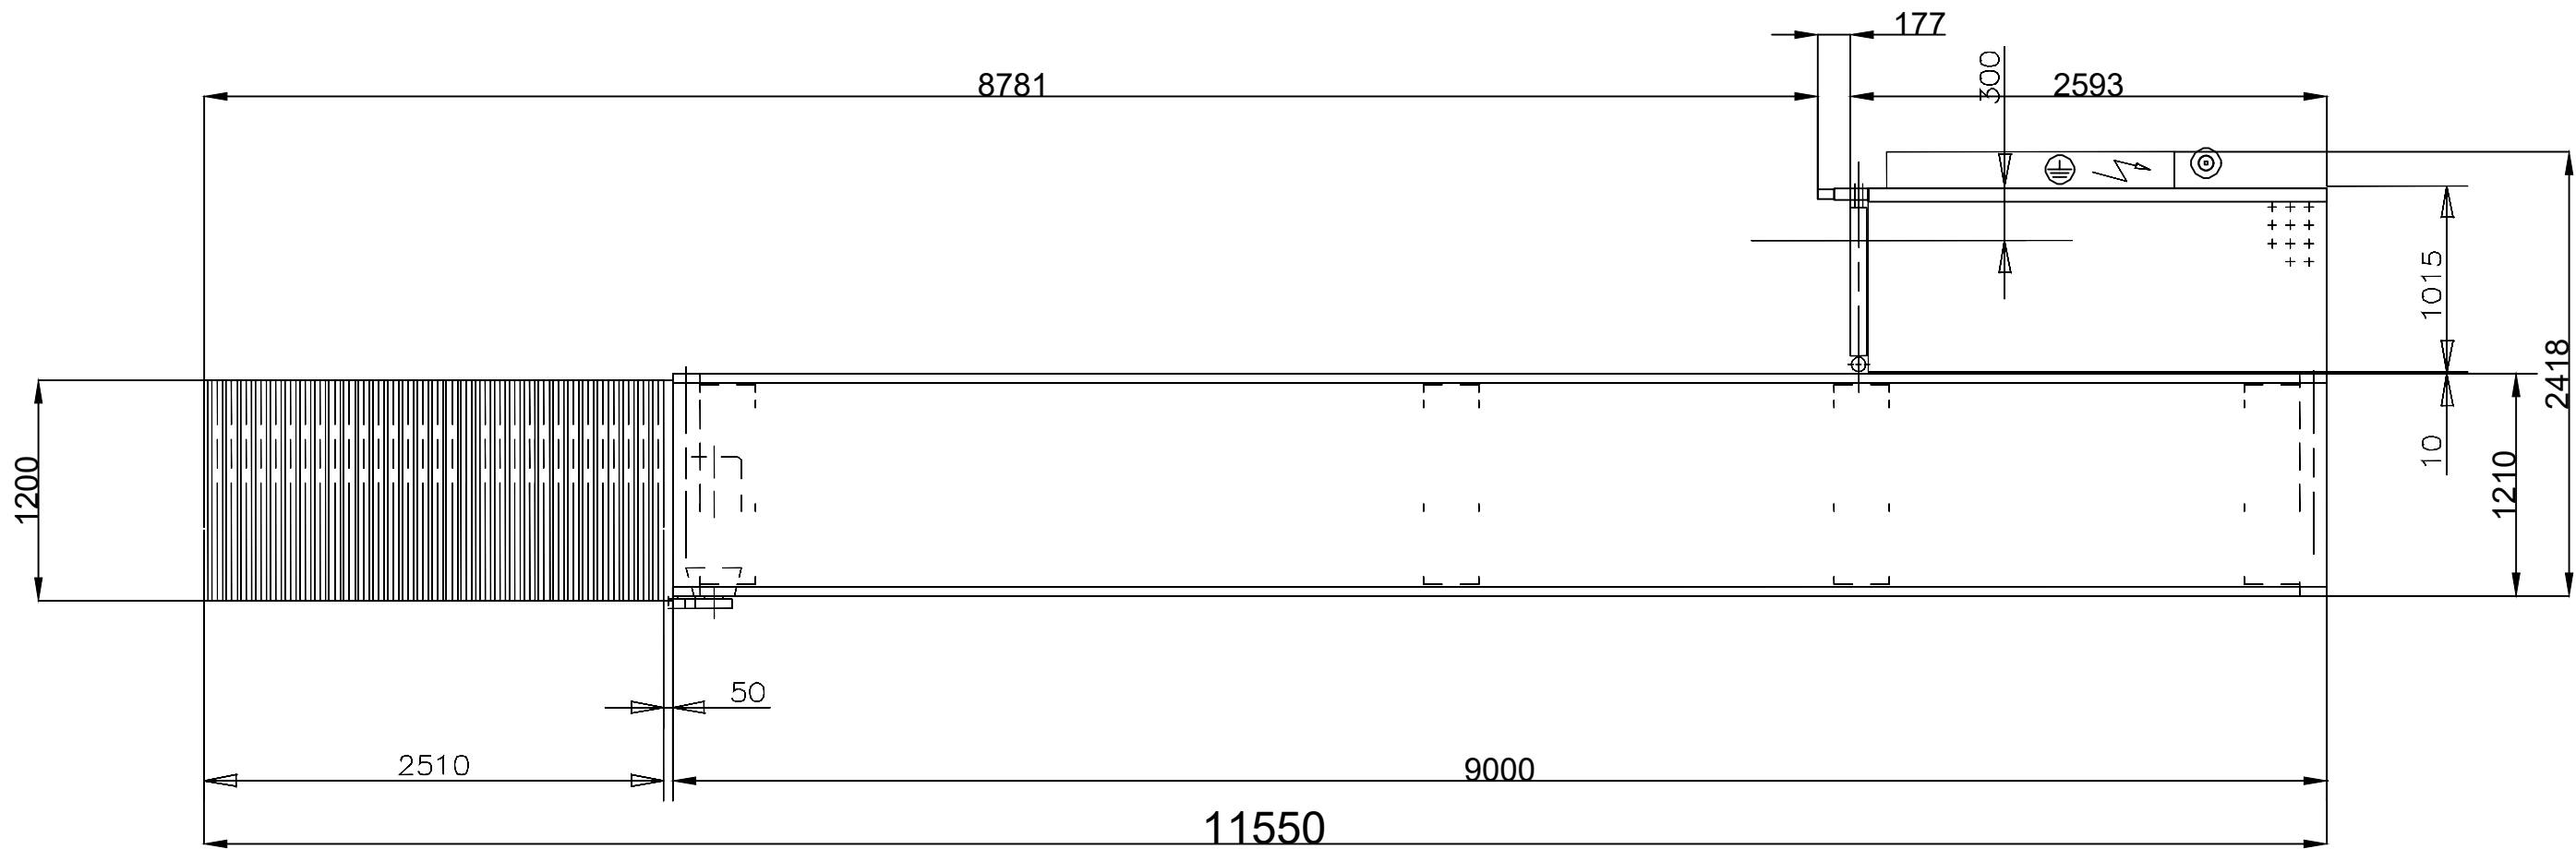

⊕ CONNECTION OF MAIN AND ELECTRICAL EQUIPMENT BUILDING OR FOUNDATION GROUND CONNECTION VIA RIBBON FABRIC GROUNDING STRIP. THIS EMC FUNCTIONAL GROUNDING IS REQUIRED FOR EMC STANDARD COMPLIANCE. EMV - PROTECTIVE CIRCUIT IS ONLY PERMISSIBLE IN COMBINATION WITH AN ALL-CURRENT-SENSITIVE/SELECTIVE RCD-PROTECTIVE SWITCH	
▽ OUTER EDGE OF CHAIN TRACK RESP. FIXED EDGE WORKPIECE OVERHANG 0	
⊙ CONNECTION FOR COMPRESSED AIR WITH HOSE 3/4" (INSIDE DIAMETER 10MM) SUPPLY 01: AIR PRESSURE IN SUPPLY LINE MIN. 6 BAR (87 PSI) STANDARD COMPRESSED AIR QUALITY ACCORDING TO ISO 8573- 1 QUALITY CLASS SOLID IMPURITIES CLASS 3 WATER CONTENT CLASS 4 TOTAL OIL CONTENT CLASS 3	
Disegnatore:	Ferwood srl
Titolo:	005386_MA
Descrizione:	Return Pieces
Versione:	LIGMATECH ZHR 05/L/085
Data:	Sistema:  Foglio: A3
Data:	
Tutti i diritti sono riservati da Copyright vietata la riproduzione	
ALL rights reserved by Copyright is forbidden to reproduce	

FerWood®
BRILLIANT SOLUTIONS FOR WOOD

FerWood srl - Via Langhe 4/A 12042 Pollenzo (CN) Italy
Tel: +39 0172 474073 - fax: +39 0172 471642
email: info@ferwoodgroup.com