


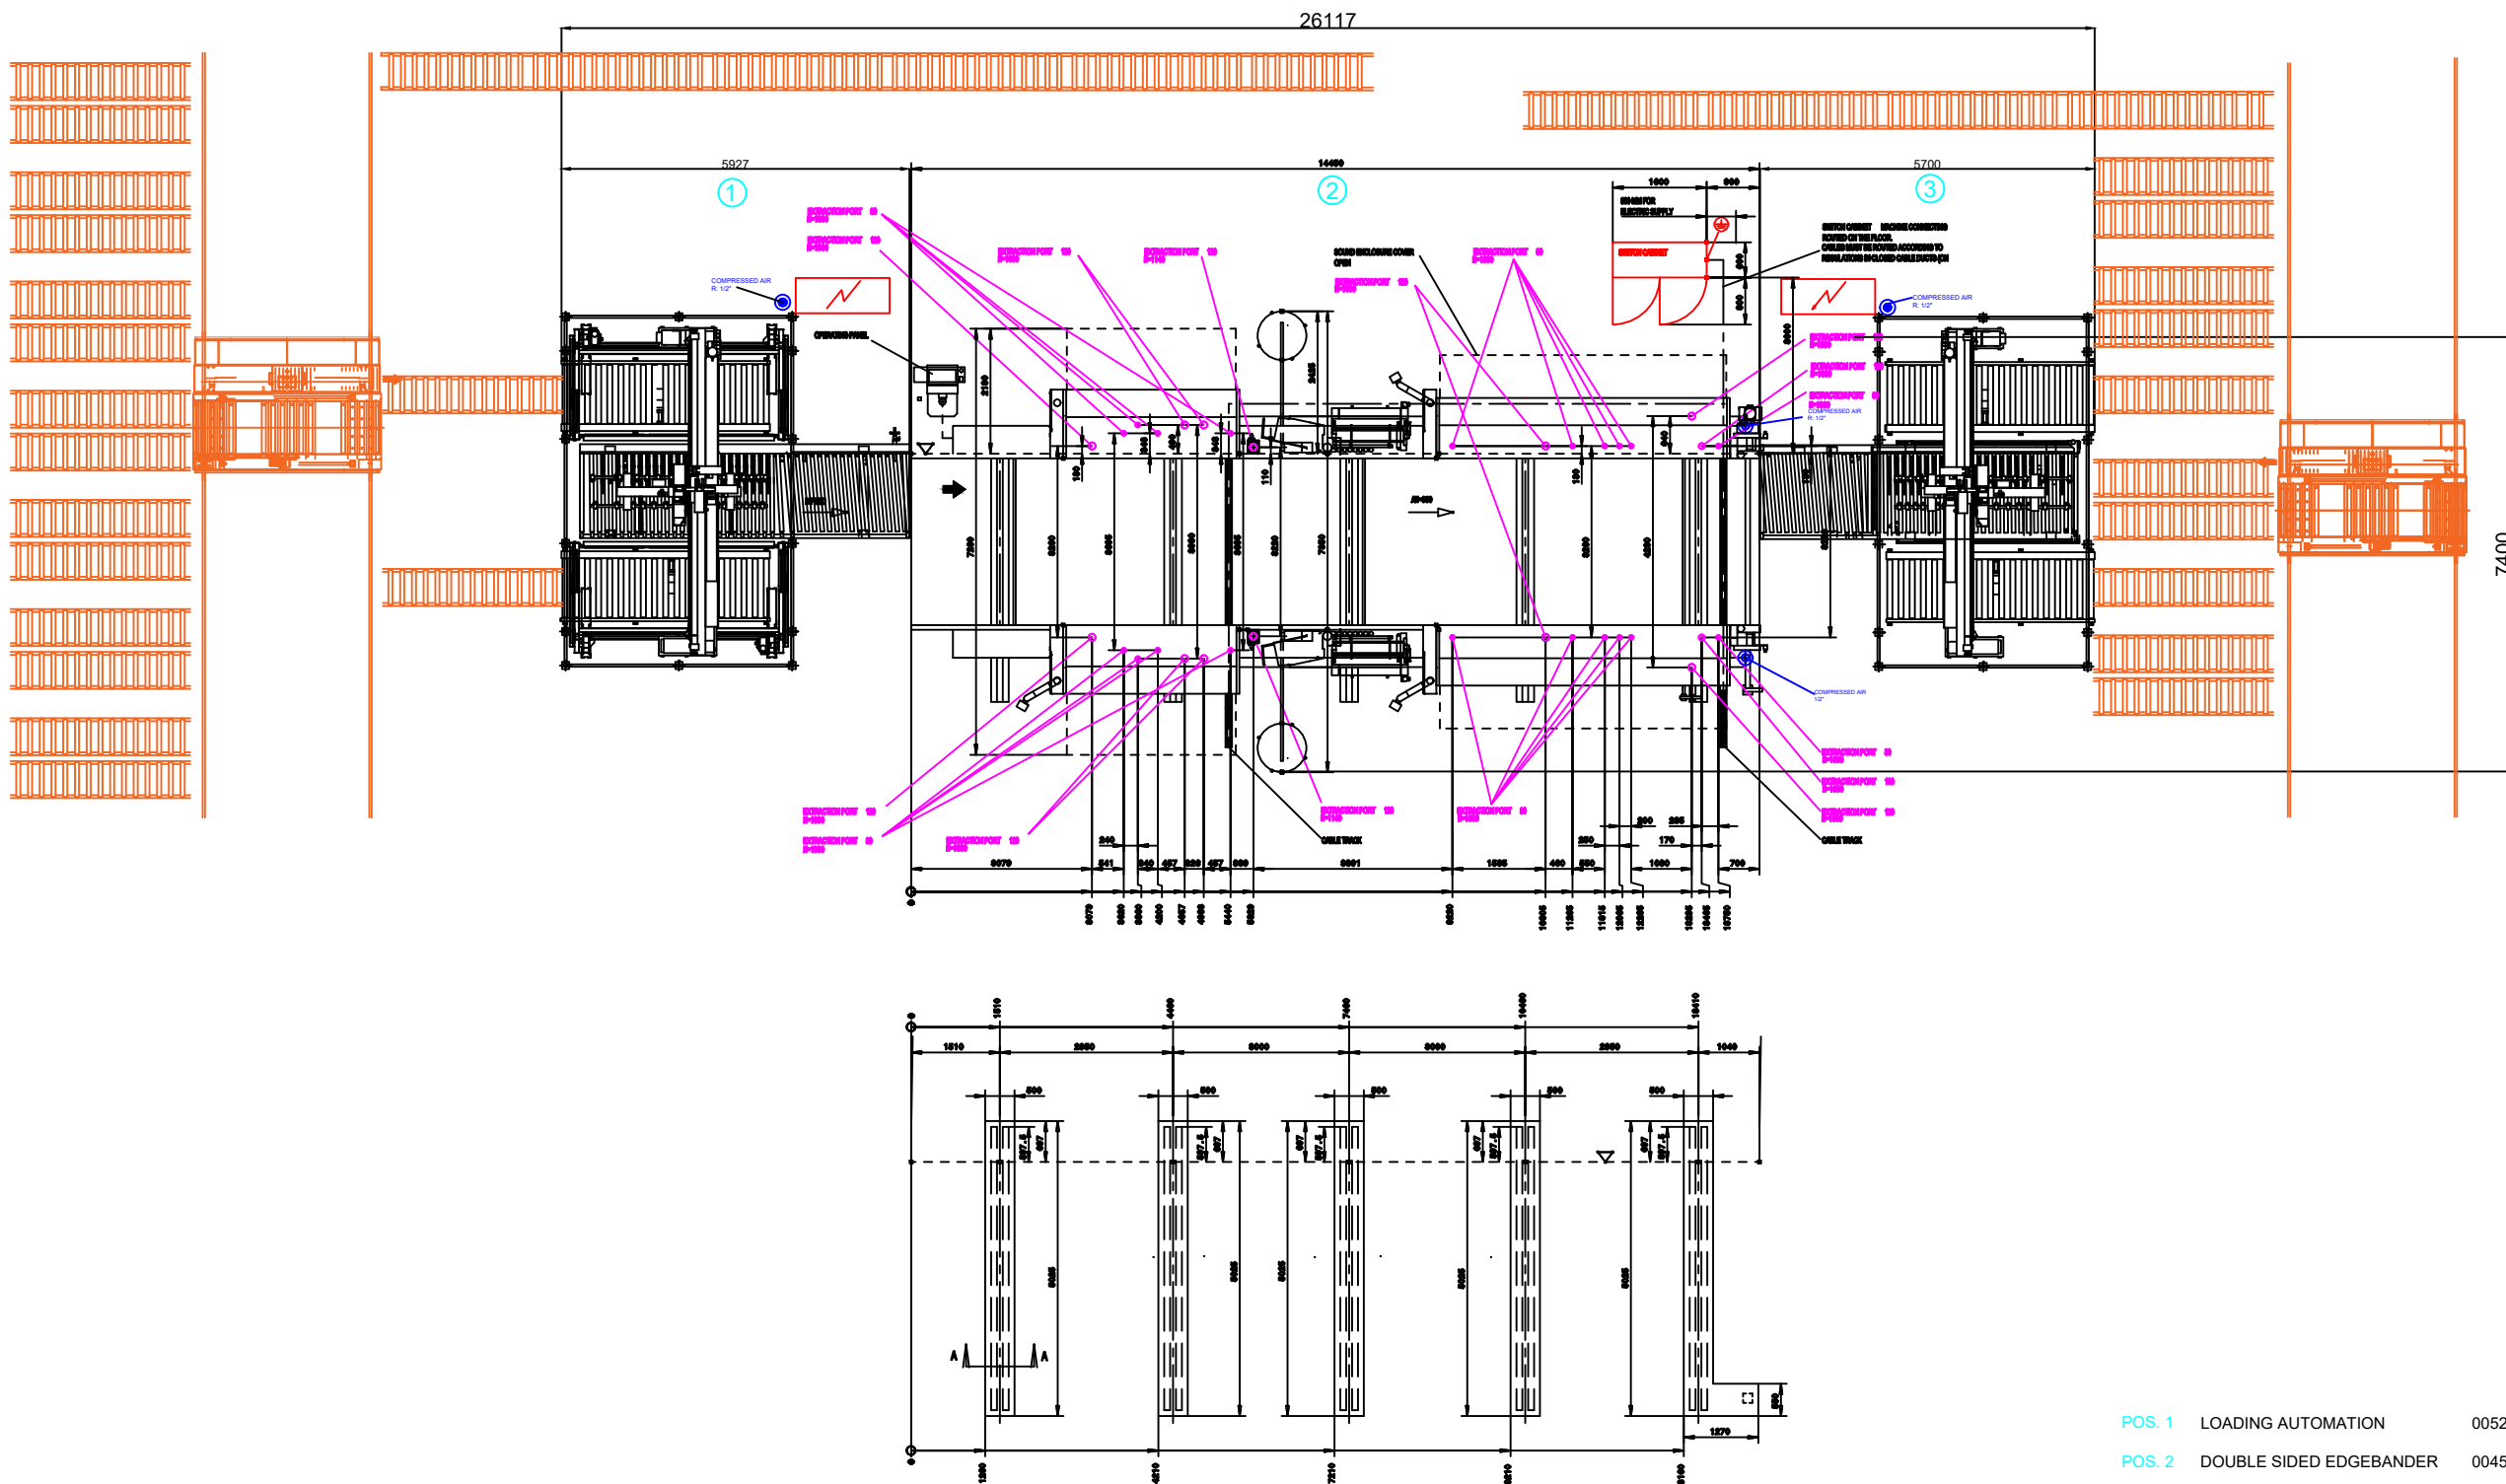

*ALL THE COMPONENTS HIGHLIGHTED IN ORANGE ARE
MANAGED BY THE CUSTOMER WITH REGARD TO THEIR
INSTALLATION

TECHNICAL DATA	POS 1	POS 2	POS 3
TOTAL DUST EXTRACTION CAPACITY APPROX M3/H	-	22340	-
AIR SPEED M/S	28	28	28
AIR CONNECTIONS / PRESSURE BAR	R:1/2" 7 BAR	R:1/2" 7 BAR	R:1/2" 7 BAR
AIR CONSUMPTION APPROX NL/MIN	150	2840	150
PROTECTION TYPE	IP53	IP53	IP53
OPERATING VOLTAGE	400V-3PH-N-PE	400V-3PH-N-PE	400V-3PH-N-PE
FREQUENCY HZ	50	50	50
TOTAL CONNECTED LOAD APPROX. KW	20	126	20
NOMINAL CURRENT A	40	232	40
BACKUP FUSE A	50	250	50

- POS. 1 LOADING AUTOMATION 005297 MAHROS BRUSH/D 1332 CSL
- POS. 2 DOUBLE SIDED EDGEBANDER 004517 HOMAG KGL 620/23/QE/30
- POS. 3 UNLOADING AUTOMATION 005298 MAHROS BRUSH/D 1332 S

Disegnatore: Ferwood srl		FerWood® BRILLIANT SOLUTIONS FOR WOOD FerWood srl - Via Langhe 4/A 1204~ Pollenzo (CN) Italy Tel: +39 0172 474073 - fax: +39 0172 471442 email: info@ferwoodgroup.com	
Titolo: 005755_OLI			
Descrizione: Production Line HOMAG - MAHROS			
Data:			
Sistema:			
Foglio: A3			
Tutti i diritti sono riservati da Copyright. vietata la riproduzione All rights reserved by Copyright. is forbidden to reproduce			