



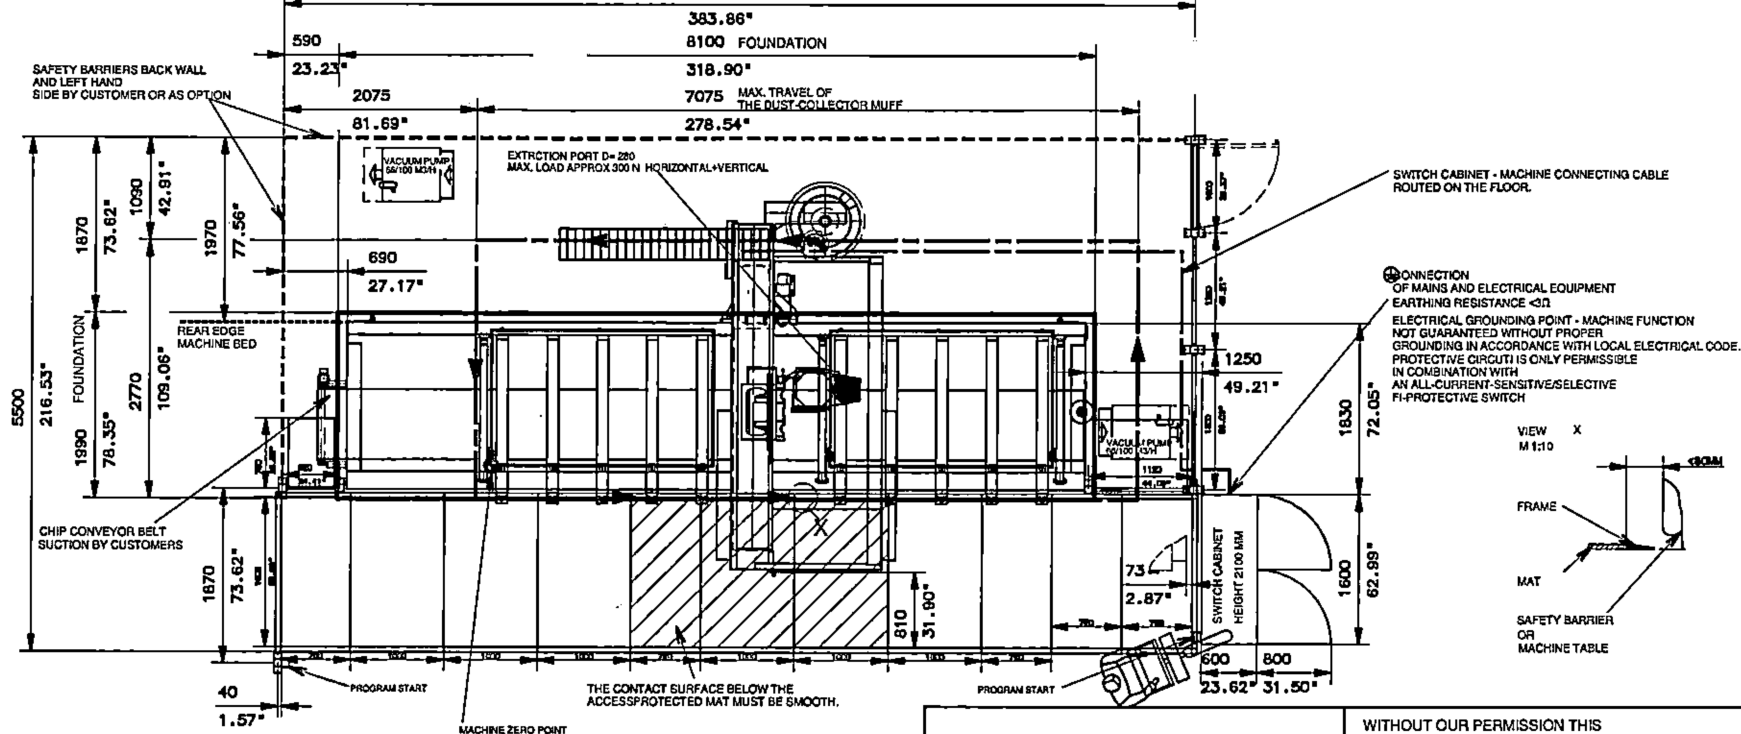

SCHEMATIC SIDE VIEW

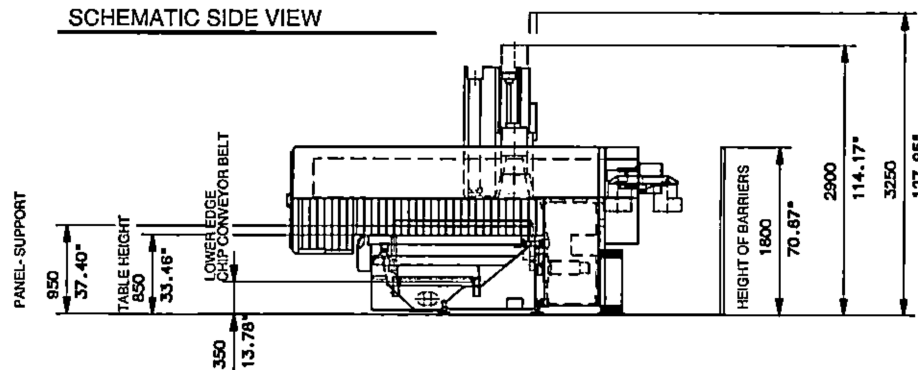

TECHNICAL DATA		
TOTAL DUST EXTRACTION CAPACITY CA.	M3/H	7000 4120
AIR VELOCITY	M/SEC	32 105
NEGATIVE AIR PRESSURE IN	PA	2000 7.87
COMPRESSED AIR CONSUMPTION APPROX.	SL/MIN	300 10.6
TOTAL CONNECTED LOAD CA.	KW	26
NOMINAL CURRENT APPROX.	A	39
RECOMMENDED BACK-UP FUSE	A	50

WITHOUT OUR PERMISSION THIS DRAWING MUST NOT BE REPRODUCED NOR DUPLICATED NOR MADE ACCESSIBLE TO THIRD PARTIES OR COMPETITORS	
SURFACE PRESSURE IN THE AREA OF THE POINTS OF SUPPORT: 1.5 N/MM² HARDNESS CLASS OF CONCRETE = C25/30 XC1 NECESSARY FLOOR LOAD OF THE HALL GROUND IN THE AREA OF THE MACHINE BED: 11 KN/M² 1.5 LBF/SQ. INCH MIN. CONCRETE THICKNESS = 250 MM 9.8" NEITHER HEIGHT DIFFERENCES NOR JOINTS ARE ALLOWED. IN CASE THE MACHINE IS INSTALLED NEXT TO A VIBRATION GENERATOR (E.G. PRESS. TUGG FORK LIFT ETC.) THE MACHINE BED MUST BE SURROUNDED BY A STYROPOR EXTENSION JOINT.	
THE MACHINE IS NOT CONFORM WITH CE REGULATION WITHOUT SAFETY BARRIER AND MUST NOT BE OPERATED.	
ADDITIONAL COSTS IN CASE OF SWITCH CABINET MODIFICATION OR CHANGES TO THE GRID	
MODIFICATIONS HAVE TO BE NOTIFIED TO HOMAG WITHIN 10 DAYS. AFTER THAT NO MODIFICATIONS ARE POSSIBLE ANY MORE.	
CONNECTION FOR COMPRESSED AIR WITH HOSE 3/4" INSIDE DIAMETER 19MM SUPPLY G1" AIR PRESSURE IN SUPPLY LINE MIN. 7 BAA 100 PSI STANDARD COMPRESSED AIR QUALITY ACCORDING TO ISO 8573-1 QUALITY CLASS SOLID IMPURITIES CLASS 3 WATER CONTENT CLASS 4 TOTAL OIL CONTENT CLASS 3	

PROFI BOF311/60/F/K

0-201-03-8305

FerWood®
BRILLIANT SOLUTIONS FOR WOOD

PROJECT:	
CODE:	004160
TYPE:	CNC WORKING CENTER
BRAND:	HOMAG BOF 311/60/F/K
DESIGNER:	
DATE:	
FILE:	