


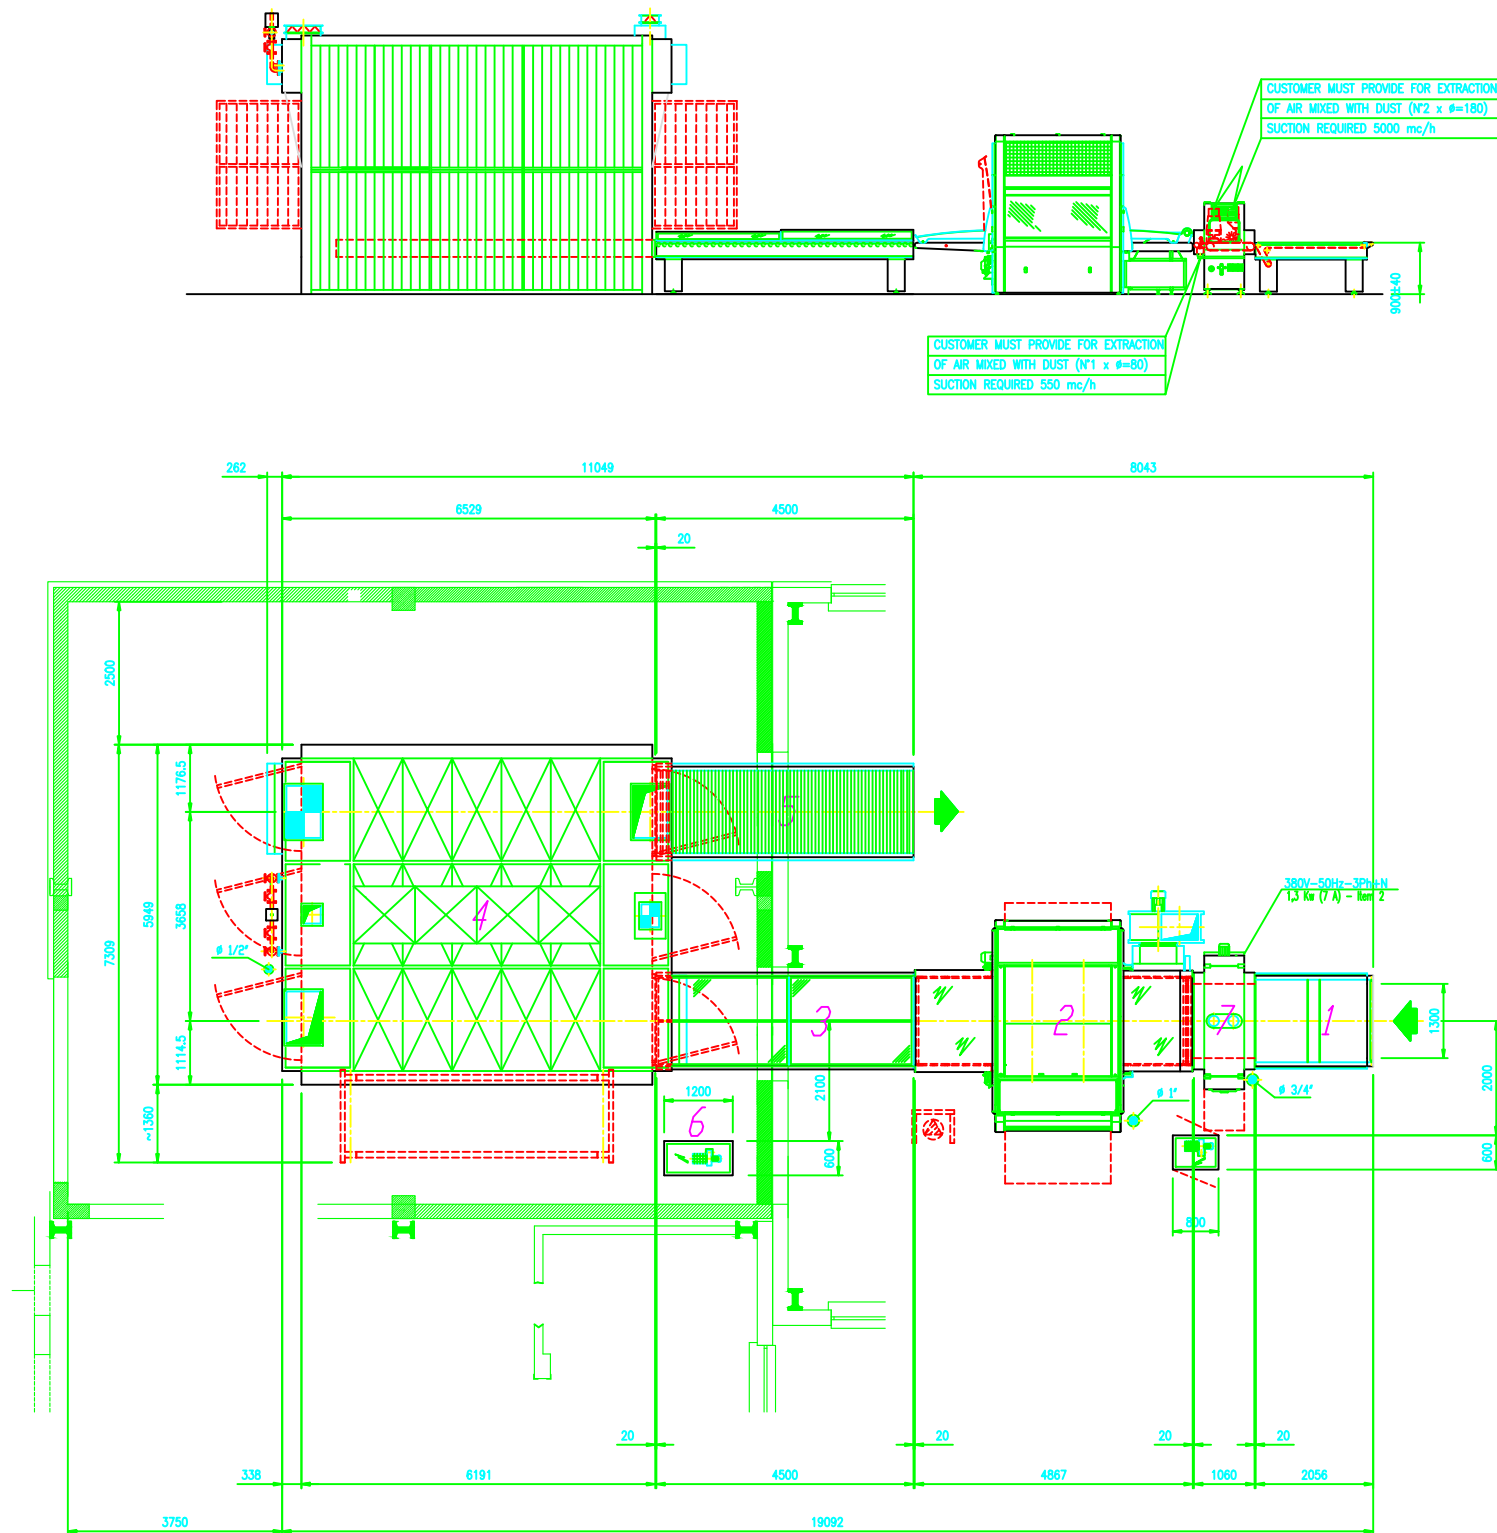

COMPRESSED AIR CONNECTION POINTS
SUPPLY PRESSURE TO MACHINES 6 BAR $\pm 10\%$
QUALITY CLASS REQUIRED: N° 3.4.3 ISO 8573.1 REGULATION

AIR INLET FROM THE OUTSIDE ($T_{min} -5^{\circ}C$)

AIR EXHAUST OPENING TO THE OUTSIDE

AIR INLET FROM THE ROOM

ITEM	DESCRIPTION	ELECTRIC POWER kW	THERMAL POWER kcal/h	COMPRESSED AIR CONSUMPTION l/min	AIR MIXED WITH SOLVENTS EXTRACTED OUTSIDE mc/h	AIR MIXED WITH DUST EXTRACTED OUTSIDE mc/h	MAKE UP AIR-AIR TO BE EVENTUALLY RECOVERED mc/h
1	BELT CONVEYOR	0,26	0	0	0	0	0
2	SPRAYING MACHINE	17,10	0	~50	12000	0	12000
3	ROLLER CONVEYOR	1,10	0	0	0	0	0
4	VERTICAL OVEN	18,30	130000	120	7000	0	Max 10000
5	ROLLER CONVEYOR	1,10	0	0	0	0	0
6	ELECTRIC WIRING	0,00	0	0	0	0	0
7	BRUSHING MACHINE	1,30	0	1686	0	5550	5550
TOTAL ELECTRIC POWER OF CONTROL BOARDS: 40,3 kW				380V-50HZ-3Ph+N			
TOTAL ELECTRIC CURRENT OF CONTROL BOARDS: 98 A							

Disegnatore: FerWood spa		FerWood® BRILLIANT SOLUTIONS FOR WOOD FerWood spa - Via Langhe 4/A 1204~ Pollenzo (CN) Italy Tel: +39 0172 474073 - fax: +39 0172 471442 email: info@ferwoodgroup.com	
Titolo: 007928_La			
Descrizione:			
Data:	Sistema:	Foglio: A3	
Tutti i diritti sono riservati da Copyright. È vietata la riproduzione. All rights reserved by Copyright. It is forbidden to reproduce.			