

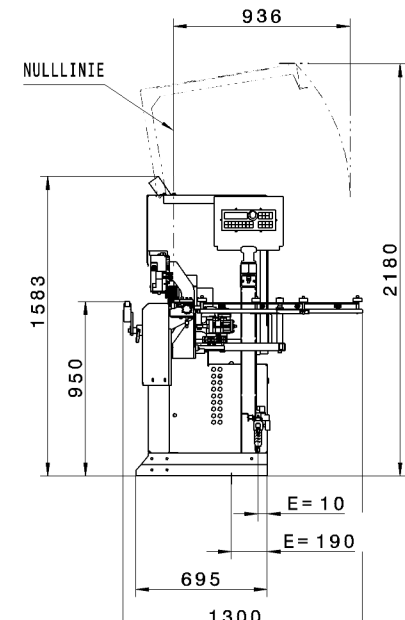
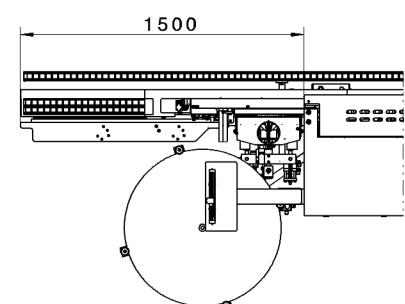


EMPFEHLUNGSLISTE:						
QUERSCHNITTS- FLAECHE ..MM/2						
SICHERUNG	16 A	20 A	25 A	35 A	50 A	63 A
LEITUNGSLAENGE						
- 10 m	2.5 mm ²	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
10 - 20 m	2.5 mm ²	4.0 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
20 - 30 m	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²	16.0 mm ²

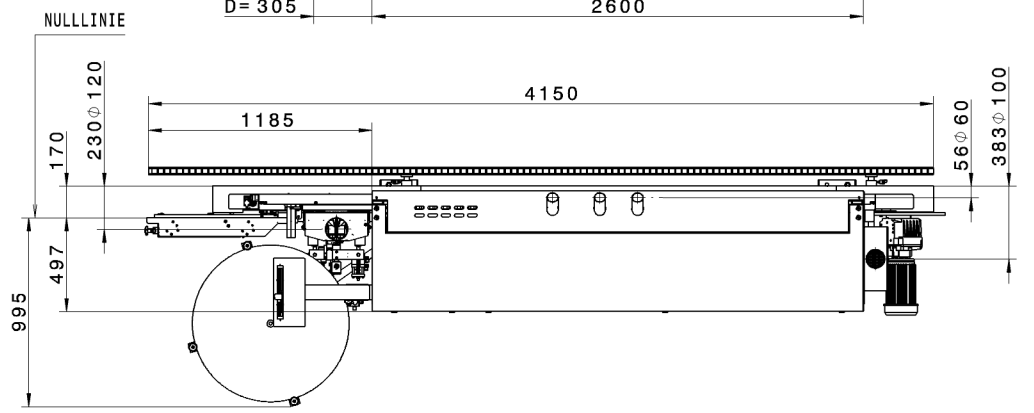

E= ELEKTROANSCHLUSS
BETRIEBSSPANNUNG
400V - 3PH - 50HZ
GESAMTANSCHLUSSWERT
9.5KW
NENNSTROM
14A
GEWICHT
CA. 1320KG

D= DRUCKLUFTANSCHLUSS
6BAR / $\phi 1/2"$
ABSAUGELEISTUNG
 $\phi 60\text{MM}$ 285M³/H
 $\phi 100\text{MM}$ 790M³/H
 $\phi 120\text{MM}$ 1140M³/H
LUFTGESCHWINDIGKEIT
28M/SEC
DRUCKVERLUST * *
CA. 2000PA
LUFTVERBRAUCH

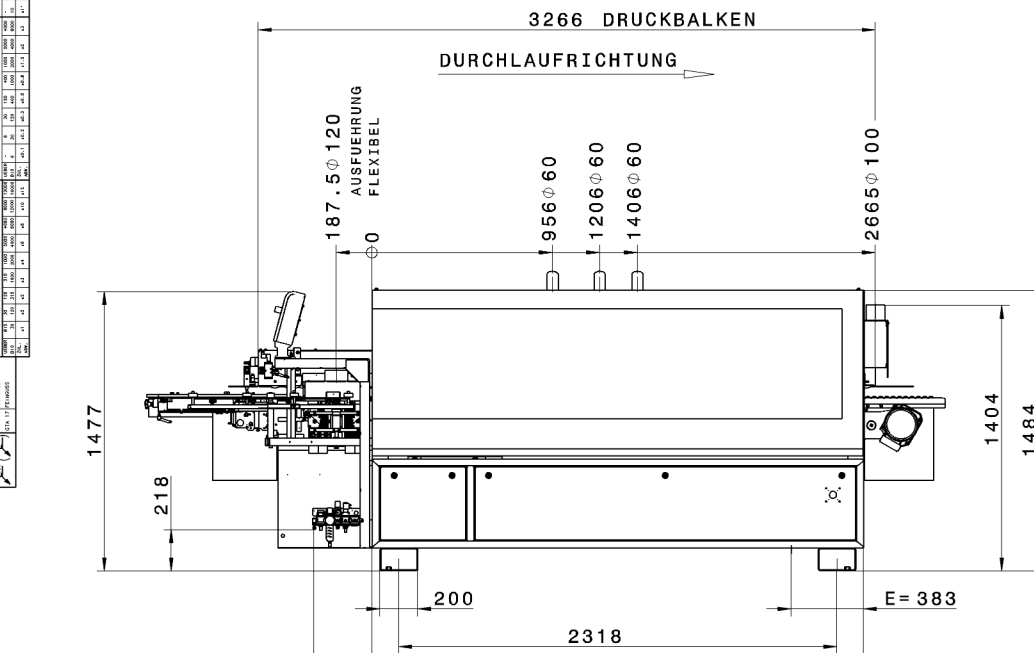

+300
VERLAENGERUNG
EINLAUF
OPTION

FerWood
BRILLIANT SOLUTIONS FOR WOOD

PROJECT:	
CODE:	006202 MA
TYPE:	SINGLE SIDED EDGE BANDER
BRAND:	BRANDT KDN 220
DESIGNER:	
DATE:	
FILE:	