


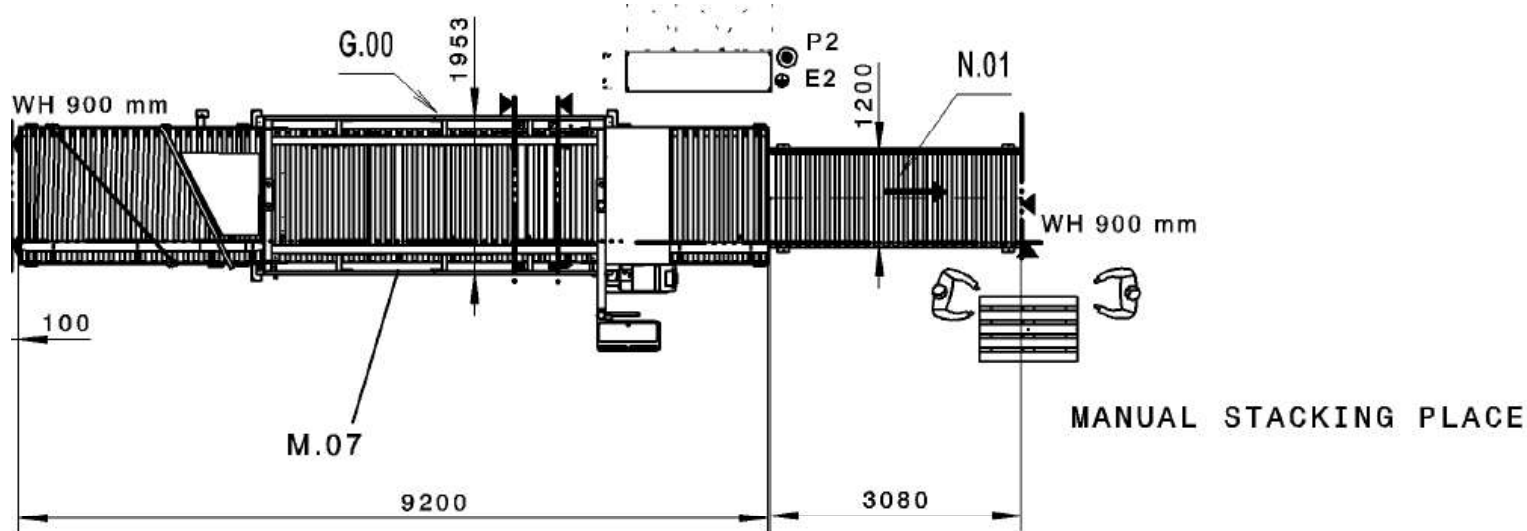


TECHNICAL DATA		E2 / P2 VKV 710
COMPRESSED AIR CONSUMPTION APPROX. NL/MIN		850
COMPRESSED AIR SUPPLY		1/2 "
PRESSURE		6 BAR
TOTAL CONNECTED LOAD	KW	25
NOMINAL CURRENT	A	40
RECOMMENDED BACK-UP FUSE	A	50

Data VKV710

box dimensions, inside

- Length: 400 ... 2500 mm
- Width: 180 ... 1100 mm
- Hight: 22 ... 250 mm



BUILDING OR FOUNDATION GROUND CONNECTION VIA RIBBON FABRIC GROUNDING STRIP.
THIS EMC FUNCTIONAL GROUNDING IS REQUIRED FOR EMC-STANDARD COMPLIANCE.
EMV-ERDUNGSWIDERSTAND <5Ω / EMV-EARTHING-RESISTANCE <5Ω
PROTECTIVE CIRCUIT IS ONLY PERMISSIBLE IN COMBINATION WITH
AN ALL-CURRENT-SENSITIVE/SELECTIVE RCD-PROTECTIVE SWITCH

Disegnatore:

FerWood s.p.a.

Titolo: 007667_La

Descrizione:

LIGMATECH - VKV 710/25/11/R

Data:

Sistema:

Foglio: A3

Tutti i diritti sono riservati da Copyright vietata la riproduzione

All rights reserved by Copyright is forbidden to reproduce

FerWood®
BRILLIANT SOLUTIONS FOR WOOD

FerWood spa - Via Langhe 4/a 12042 Pollenzo (CN) Italy
Tel. +39 0172 474073 - Fax. +39 0172 471442

email: info@ferwoodgroup.com