


<i>Passmaß</i>	<i>Abmaß</i>
----------------	--------------

EMPFEHLUNGSLISTE :						
	QUERSCHNITTS- FLAECHE ..MM/2					
SICHERUNG	16 A	20 A	25 A	35 A	50 A	63 A
LEITUNGSLAENGE						
- 10 m	2.5 mm ²	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
10 - 20 m	2.5 mm ²	4.0 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²
20 - 30 m	2.5 mm ²	4.0 mm ²	6.0 mm ²	10.0 mm ²	16.0 mm ²	16.0 mm ²

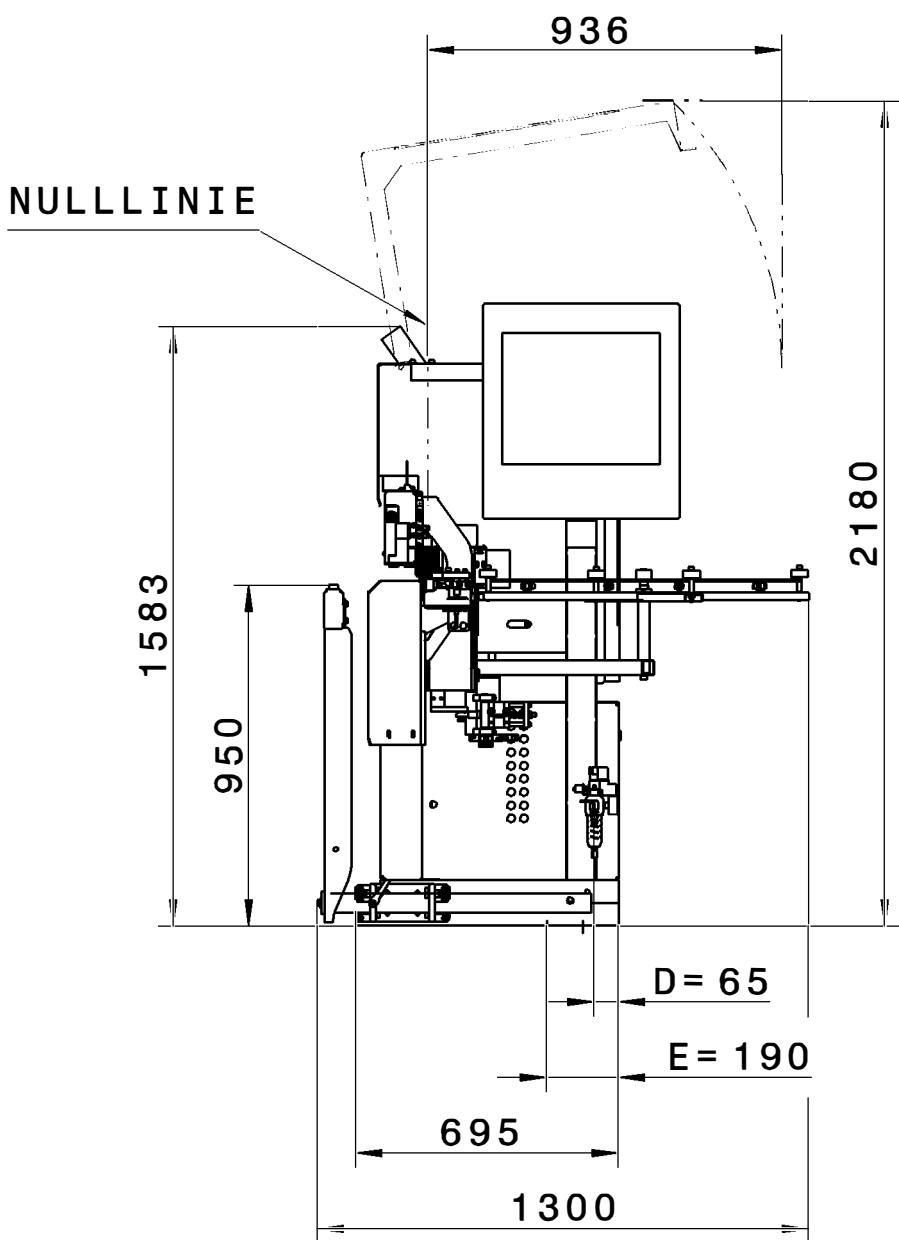

E = ELEKTROANSCHLUSS
BETRIEBSSPANNUNG
400V - 3PH - 50HZ
GESAMTANSCHLUSSWERT
13 KW
NENNSTROM
19 A
GEWICHT
1330 KG


D = DRUCKLUFTANSCHLUSS
6BAR / $\varnothing 1/2"$
GESAMTABSAUGELEISTUNG
3460 M3/H

LUFTGESCHWINDIGKEIT
28M / SEC

DRUCKVERLUST * *

CA. 2000PA

LUFTVERBRAUCH

Disegnatore: FerWood spa		 BRILLIANT SOLUTIONS FOR WOOD FerWood spa - Via Langhe 4/A 12047 Pollenzo (CN) Italy Tel: +39 0172 474073 - fax: +39 0172 471442		
Titolo:				
Descrizione: 007719_La				
		email: info@ferwoodgroup.com		
Data: 04/12/24	Sistema: 			
				Foglio: A3
Tutti i diritti sono riservati da Copyright [©] vietata la riproduzione		All rights reserved by Copyright [©] is forbidden to reproduce		

